



SHAANXI YANCHANG PETROLEUM GROUP RUBBER CO.,LTD

ADDRESS:NO.1 TONGYI ROAD,FENGDONG NEW AREA,XIXIAN NEW DISTRICT,XI' AN CITY,SHAANXI PROVINCE,CHINA



SHAANXI YANCHANG PETROLEUM GROUP RUBBER CO.,LTD

PCR CATALOGUE





CONTENT

Passenger Car Product Map	01 - 02
SUV/VAN/LT/4X4-Offroad Product Map	03 - 04
Winter Product Map	05 - 06
Passenger Car Series	07 - 16
SUV/VAN/LT/4X4-Offroad Series	17 - 27
Winter Series	28 - 32
Technical Parameters	33 - 40

Shaanxi Yanchang Petroleum Group Rubber Co., Ltd. (Yanchang Rubber) is located in national-grade Xixian new district, Xi'an City, Shaanxi Province, where production facilities cover a total area of 1.66 million m² with more than 2,000 employees. The company is a modern tyre manufacturing enterprise, which was built and funded with 4.85 billion RMB by Shaanxi Yanchang Petroleum Group in 2008. Designed with annual capacity of 20 million radial tyres, including 4 million commercial vehicle tyres and 16 million passenger car tyres, Yanchang rubber has completed the first stage project with production capacity of 2 million commercial vehicle tyres and 8 million passenger car tyres.

Yanchang Rubber abides by the principle of "Serving the market with innovation, pursuing for excellence". We are committed to researching and developing all series of tyres for commercial vehicles and passenger cars. Tyres for Passenger cars cover eight series, 210 sizes and 350 products: ultra-high performance radial tyres, high performance tyres, Run flat tyres, snow tyres, sport truck, SUV-HT/AT/MT tyres and light truck tyres. Tyres for commercial vehicles cover 6 series, 27 sizes, 24 patterns and over 200 products: light truck tyre, tube truck tyre, tubeless long distance tyre, mining tyre and military tyre. All tyres are widely used on different areas and different applications.



In the past ten years, Yanchang Rubber has successfully built Duratum, a renowned brand of tyre with advanced technologies and great performances. Duratum has been exported to more than 80 countries worldwide, such as North America, Europe, Southeast Asia, Australia, Middle East, Africa, Latin-America.


With the company development vision of "Domestic advanced product, Global recognized brand", Yanchang Rubber imported a series of equipment from global famous manufacturers, including Japan's KOBELCO, Germany's Troester, US Battelle Memorial Institute, Italy's Comerio ercole S. P. A and Netherland's VMI. These equipments provide reliable hardware assurance for producing world-class tyres. To guarantee the safety, stability and reliability of our tyres, Yanchang Rubber has set up laboratories equipped with the most advanced testing machine, such as X-ray machine, laboratory mixer, endurance and high-speed testing machine, bubble testing machine, uniformity testing machine, dynamic balance testing machine, automatic delivery and sorting machine.

Yanchang RUBBER utilizes the most advanced technologies to produce unique and low-carbon green tyres. These tyres are qualified for national CCC, ISO/TS16949, US DOT, Europe E-mark SNI, BIS and other quality management system certifications. And also, The uniformity and dynamic balance of military tyres are one of the best in China's Domestic market.


In Dec 2010, Yanchang (Thailand) Rubber Co., Ltd was established by Yanchang Petroleum Group in Bangkok Thailand. The company has 2.33 million m² natural rubber plantations focusing in planting, purchasing, processing and international trade of natural rubber raw material. The company provides natural rubber to Yanchang Rubber directly to ensure raw materials are with good qualities and competitive costs.

Yanchang Rubber is looking forward to cooperating with domestic and overseas customers to achieve mutual benefit together.


PASSENGER CAR PRODUCT MAP

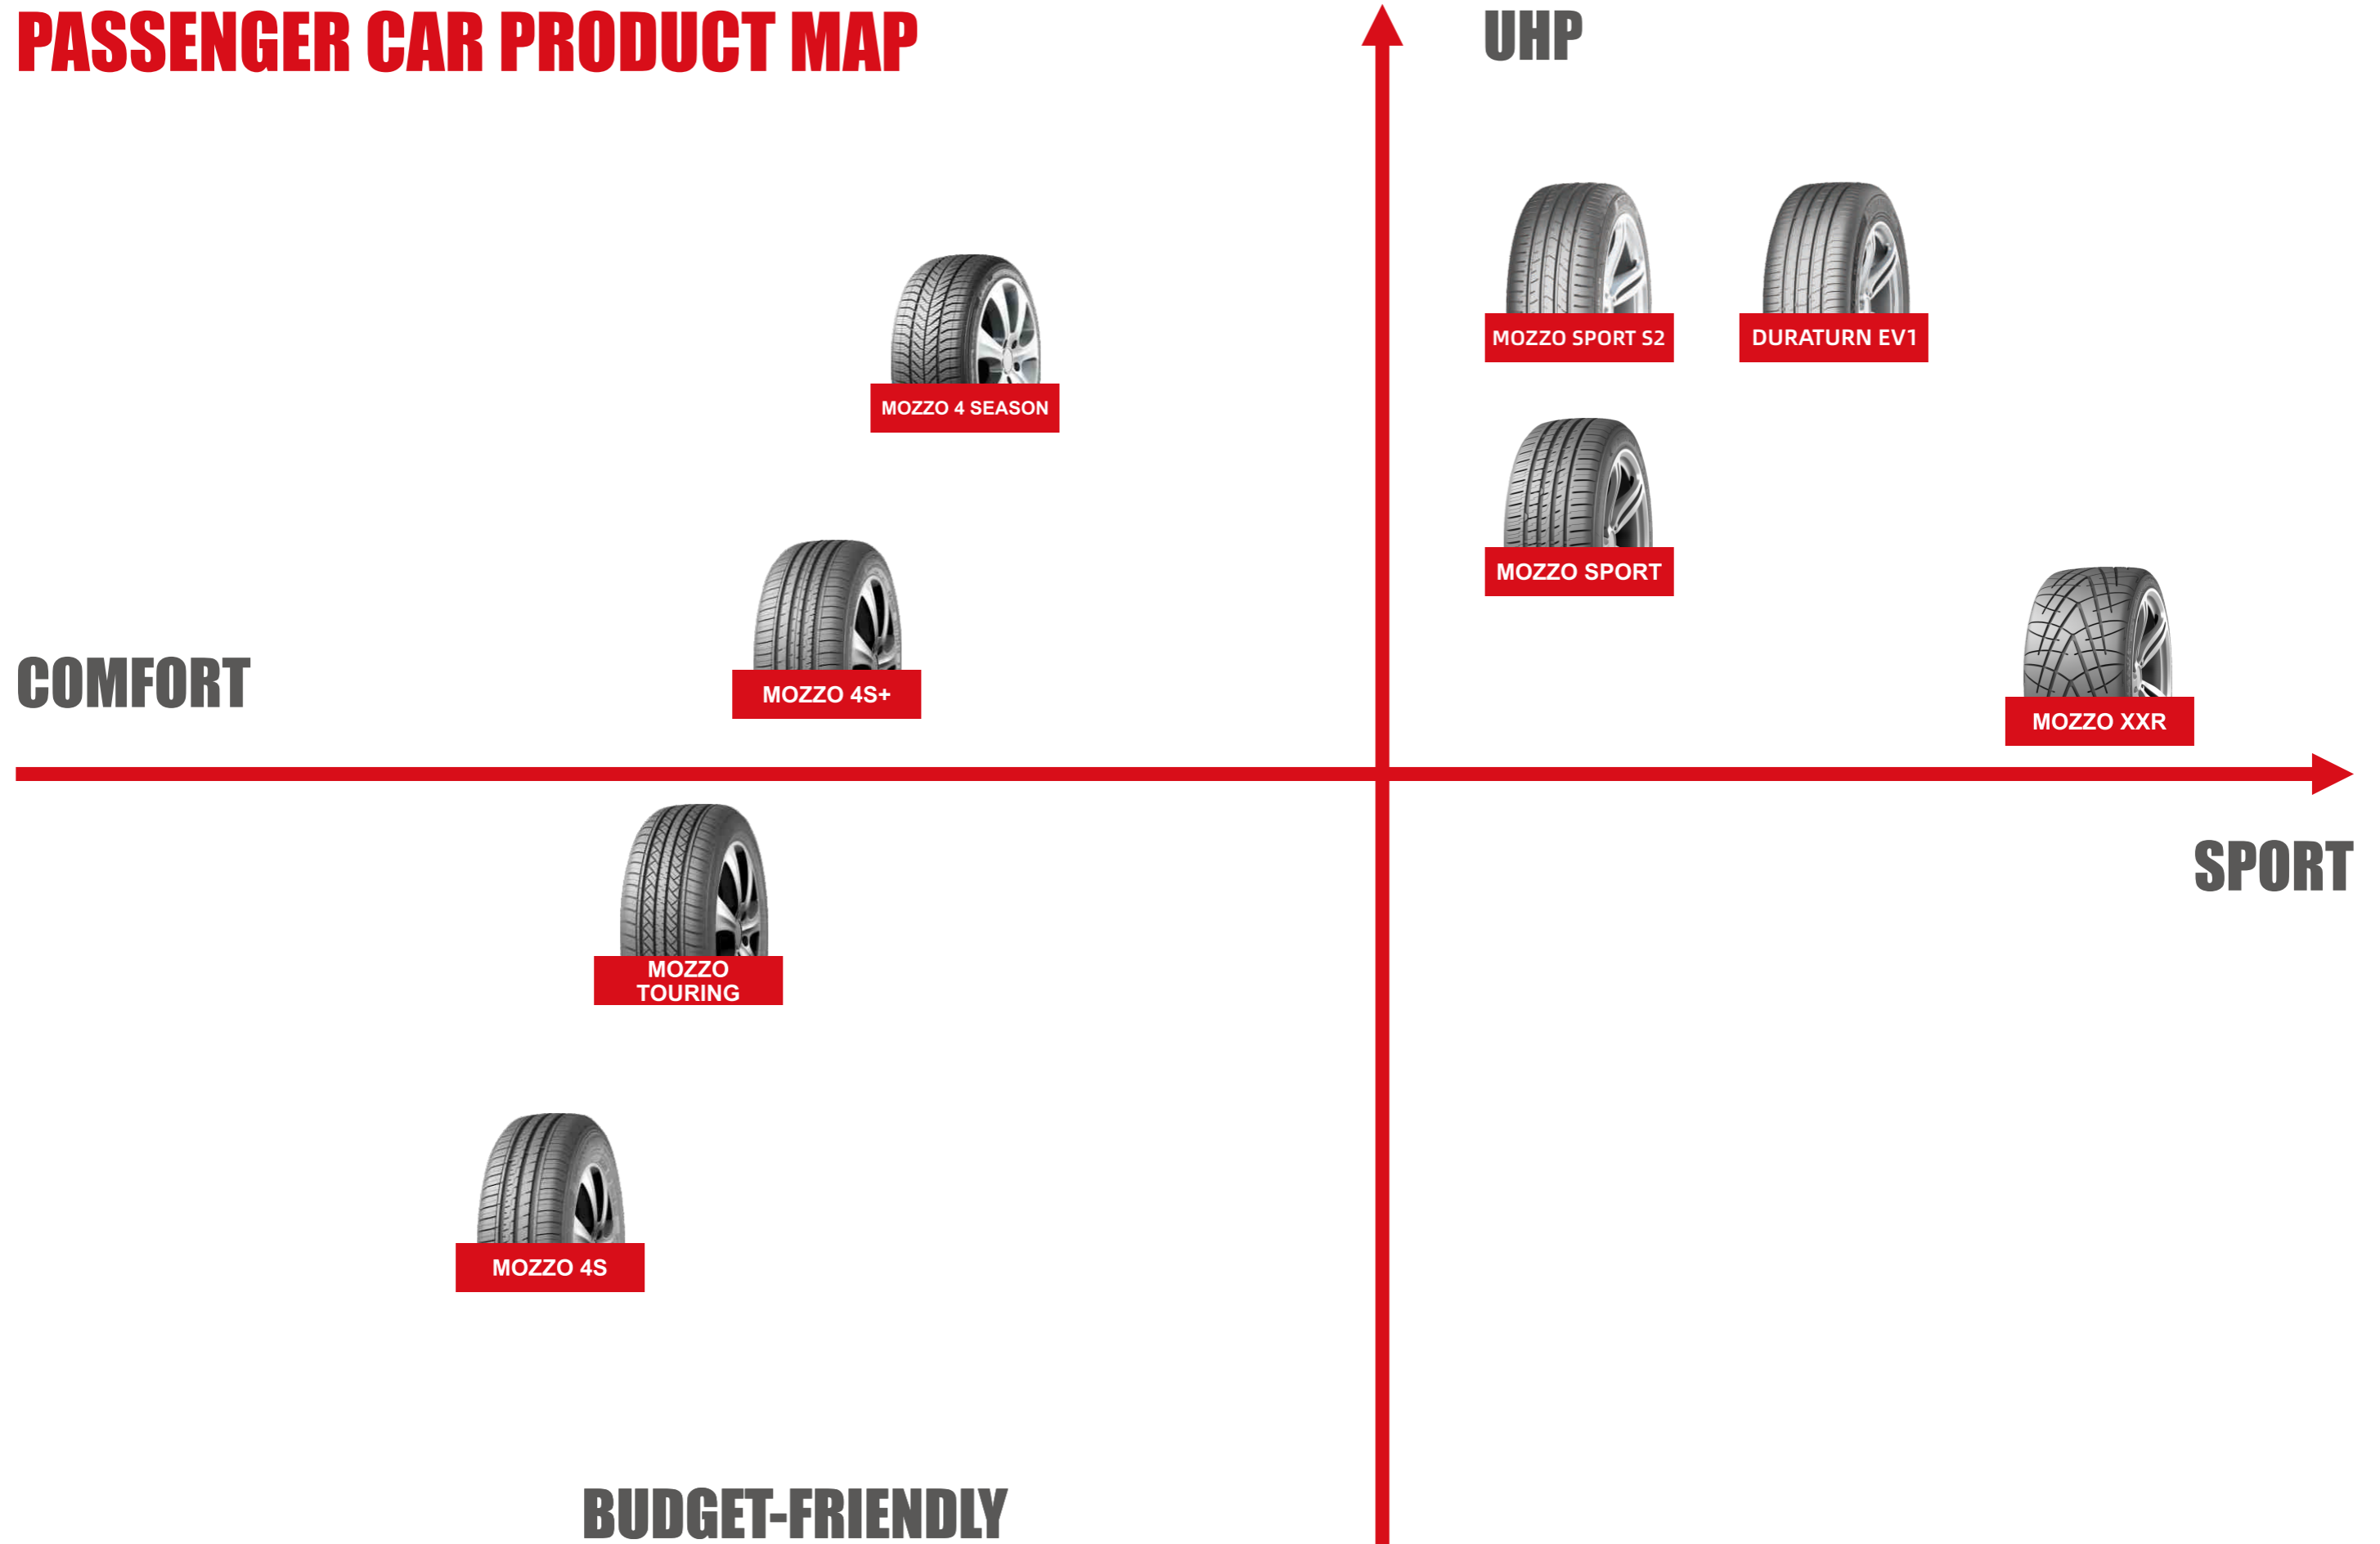

SUV/VAN/LT/4X4-OFFROAD PRODUCT MAP

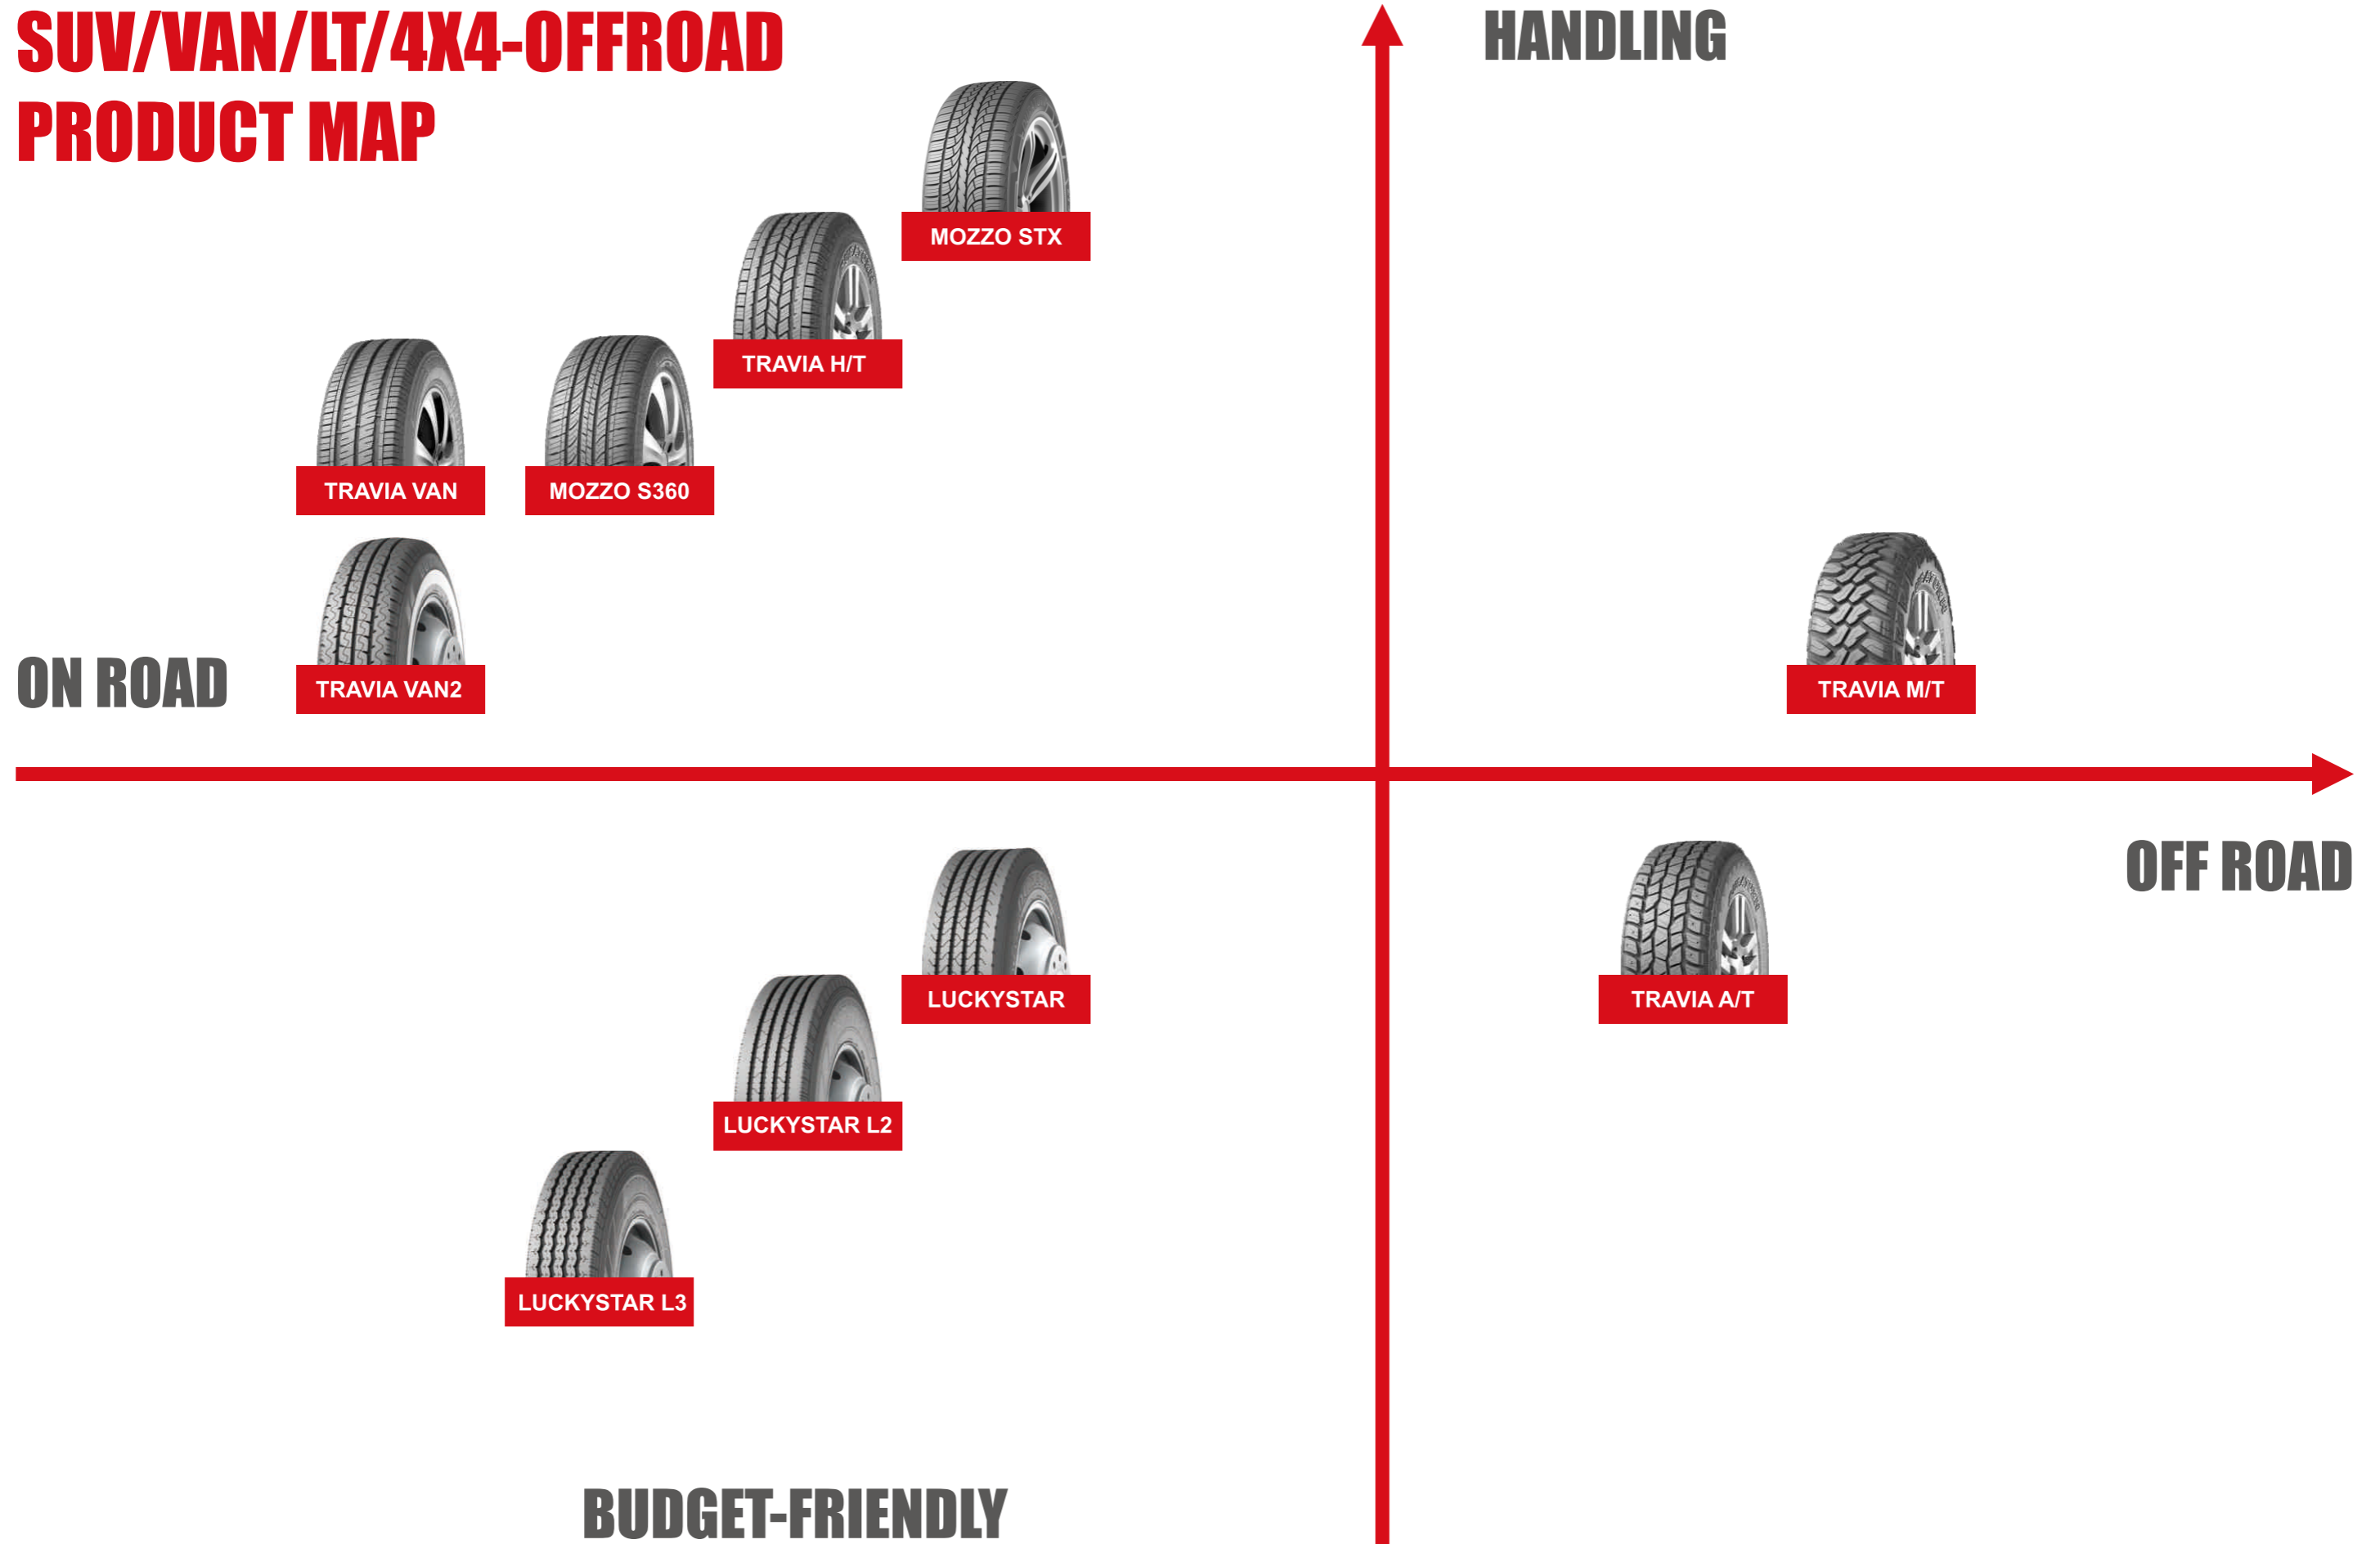

WINTER PRODUCT MAP

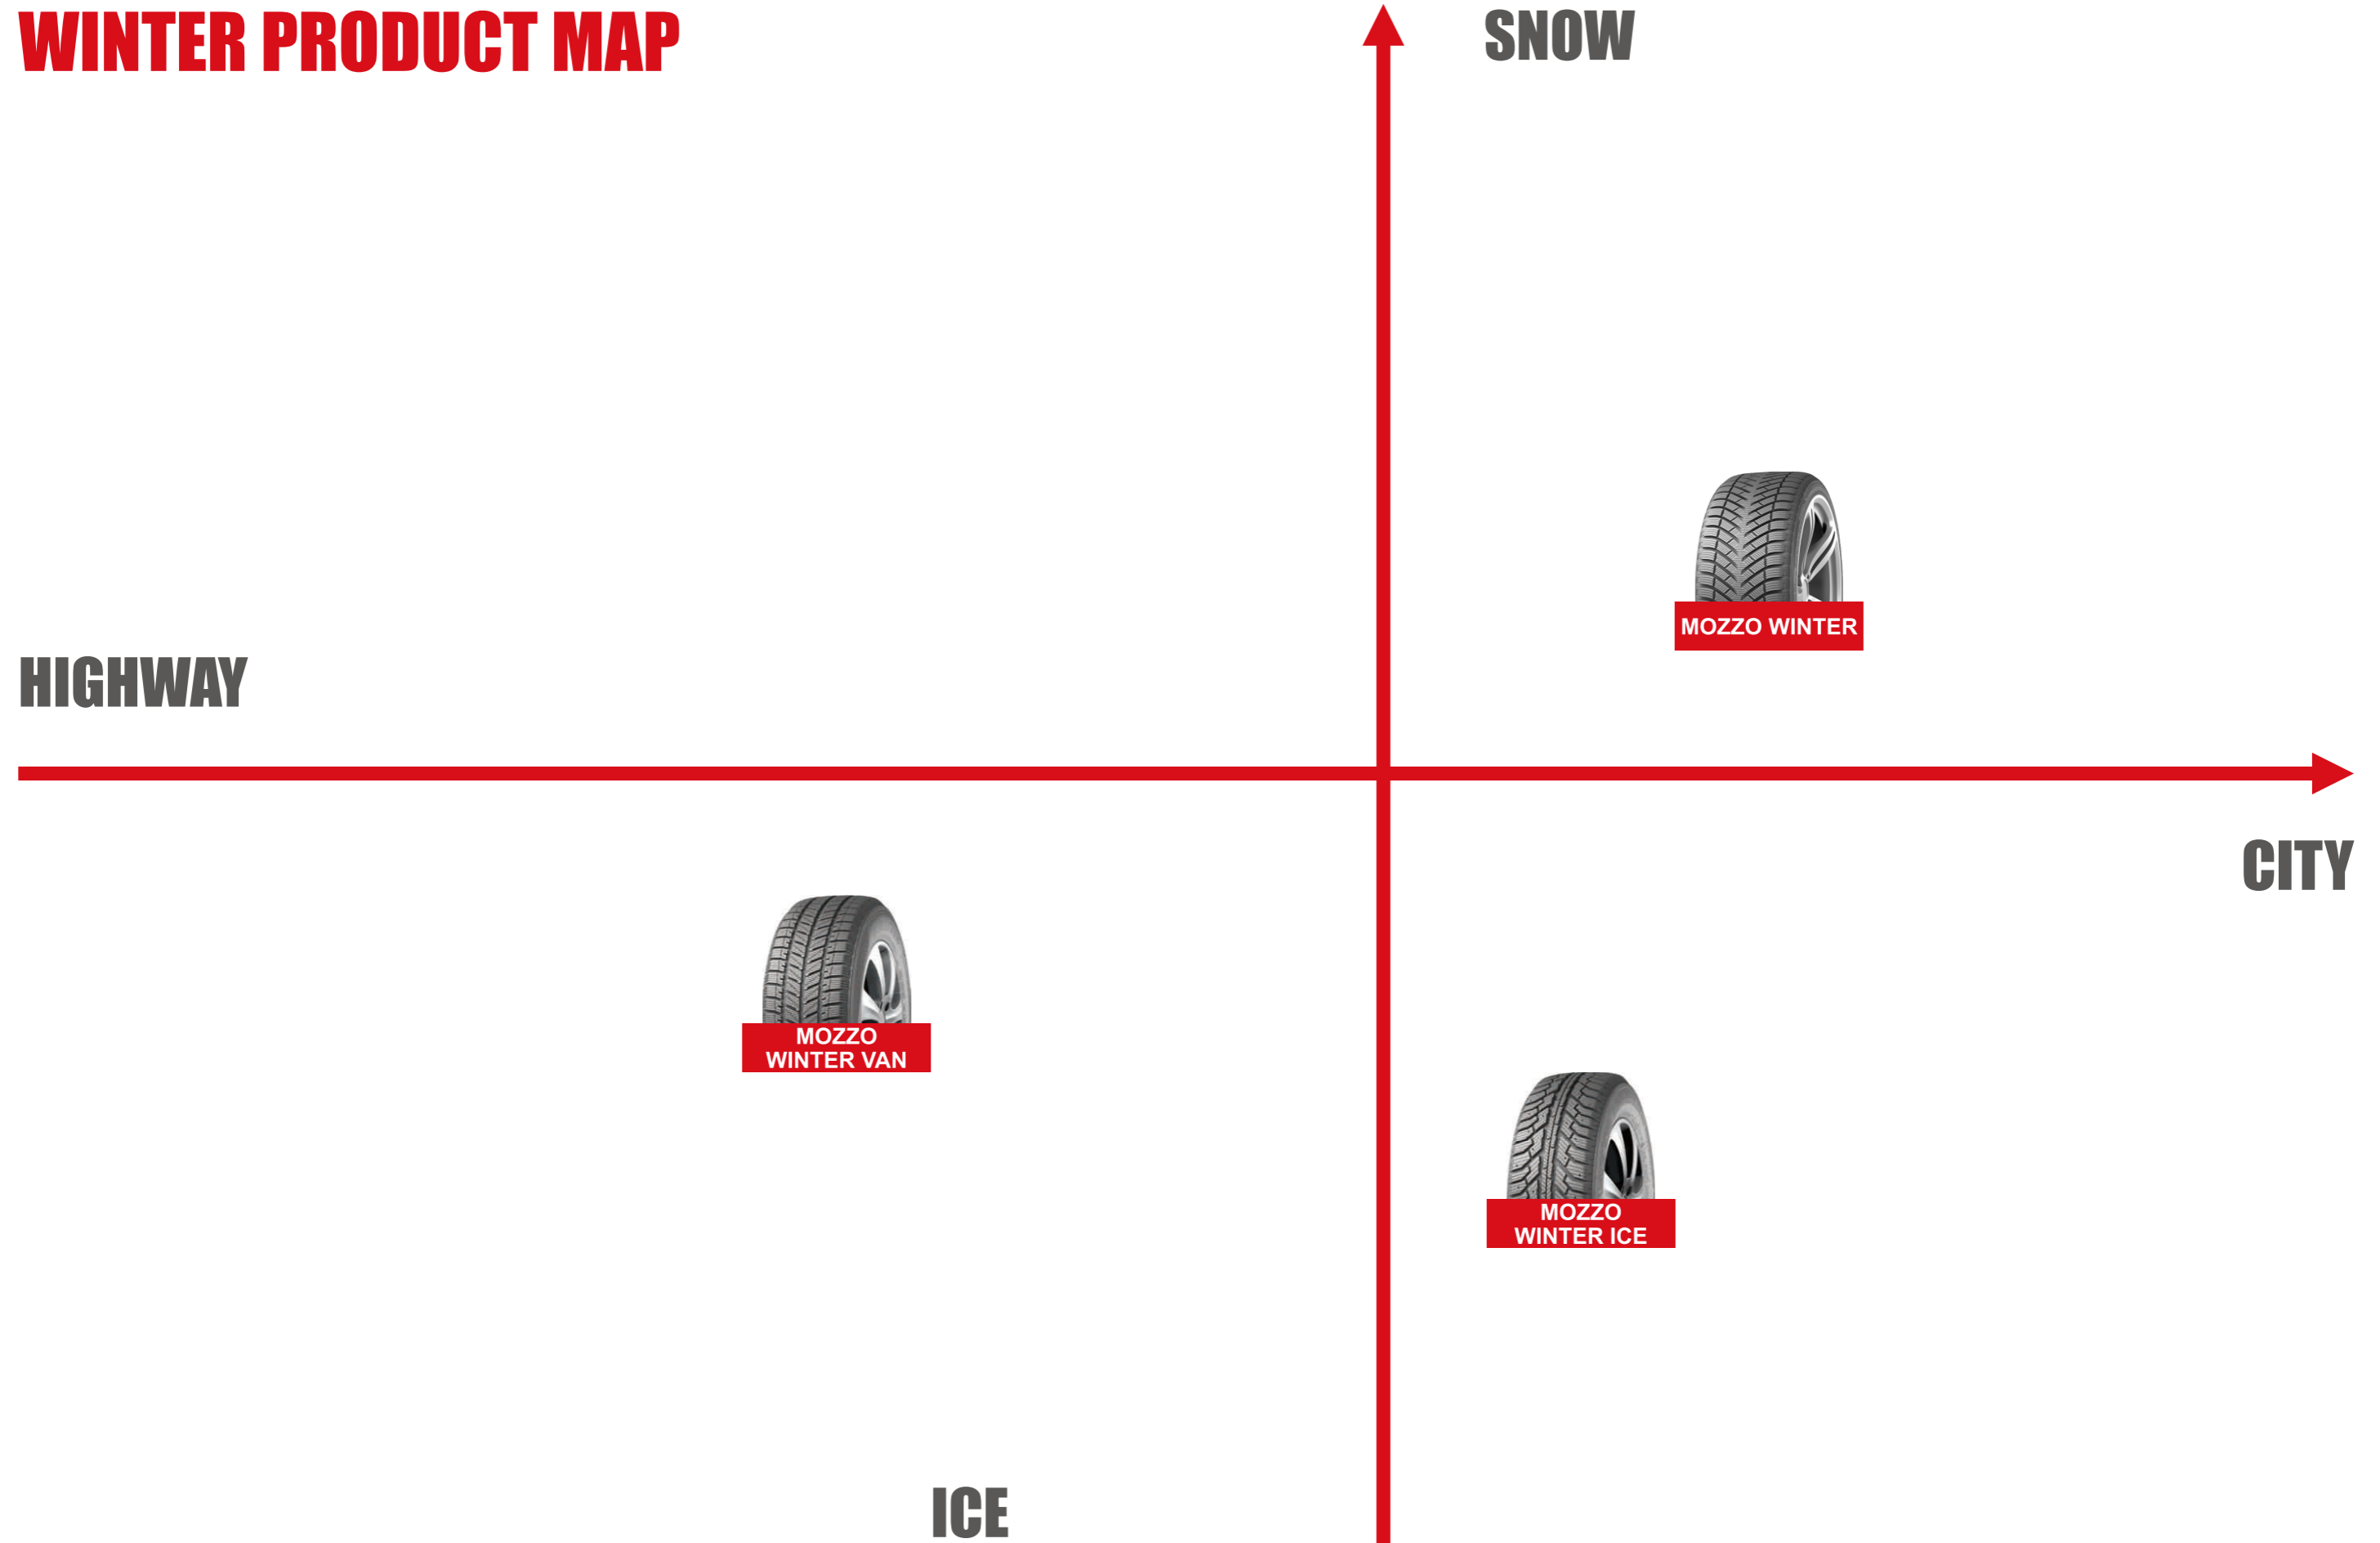

PASSENGER CAR SERIES



UHP

MOZZO SPORT S2

► Low Failure Solution

- Asymmetrical tire pattern, the outer pattern provides excellent handling performance, and the inner pattern provides better wet skid resistance.
- Special tire rim protection design effectively protects the rim edge and prolongs the service life.

► Transport Efficiency Solution

- Low-resistance formula and high-filling of silicon to enhance rolling resistance, improve.
- fuel-saving performance, and also have excellent braking performance on wet/dry road.

► Noise Reduction Solution

- Adopt a new generation of noise reduction pattern design, perfectly reduce rolling noise.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	45"	225/45R19	XL	BSW	7.5	-	96W	710	1565	340	50	8	225	685
2	45"	255/45R20	XL	BSW	8.5	-	105W	925	2039	340	50	8	255	738
3	50"	235/50R19	XL	BSW	7.5	-	103W	875	1929	340	50	8	245	719
4	50"	225/50R18	XL	BSW	7.0	-	99W	775	1709	340	50	8	233	683
5	50"	245/50R20	XL	BSW	7.5	-	105W	925	2039	340	50	8	253	754
6	50"	255/50R20	XL	BSW	8.0	-	109W	1030	2271	340	50	8	265	764
7	50"	235/55R19	SL	BSW	7.5	-	101V	825	1819	350	51	8	245	741
8	55"	245/55R19	SL	BSW	7.5	-	103H	875	1929	350	51	8	253	753
9	55"	235/55R20	XL	BSW	7.5	-	105W	925	2039	340	50	8	245	766
10	55"	255/55R19	XL	BSW	8.0	-	111W	1090	2403	340	50	8	265	763
11	55"	225/55R19	XL	BSW	7.0	-	103W	875	1929	340	50	8	233	731
12	65"	235/68R18	XL	BSW	7.0	-	110W	1060	2337	340	50	8	240	763

UHP

DURATURN EV1

► Energy Efficiency Solution

- Tread compound designed specifically for electric vehicles reduces rolling resistance effectively and improve mileage significantly .

► Transport Efficiency Solution

- Equipped with M-arc crown stabilizing technology, achieves more uniform wear between tread and ground. bringing more powerful acceleration performance.
- Asymmetric tread pattern and lightning pattern grooves are cleverly fused with precise corner-cutting design, enhances the handling and grip of the tire significantly.

► Noise Reduction Solution

- YC Silent & Noise Reduction technology bring a quieter and more comfortable driving experience.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	40"	235/40R19	-	BSW	8.5	-	96Y	630	-	350	-	-	241	671
2	45"	235/45R18	XL	BSW	8.0	-	98Y	750	-	340	-	-	236	669
3	45"	245/45R19	XL	BSW	8.0	-	102Y	850	-	340	-	-	243	703
4	45"	255/45R19	XL	BSW	8.5	-	104Y	900	-	340	-	-	255	713
5	50"	215/50R18	XL	BSW	7.0	-	96V	710	-	340	-	-	226	673
6	50"	225/50R18	-	BSW	7.0	-	95W	690	-	350	-	-	233	683
7	50"	235/50R19	-	BSW	7.5	-	99V	775	-	350	-	-	245	719
8	50"	235/50R20	XL	BSW	7.5	-	104Y	900	-	340	-	-	245	744
9	50"	245/50R18	-	BSW	7.5	-	100W	800	-	350	-	-	253	703
10	50"	255/55R20	XL	BSW	8.0	-	109Y	1030	-	340	-	-	255	764
11	55"	215/55R17	-	BSW	7.0	-	94V	670	-	350	-	-	226	668
12	60"	215/60R17	-	BSW	6.5	-	96H	710	-	350	-	-	221	690

UHP

MOZZO XXR

► Low Failure Solution

- Specially designed bead curve can effectively protect against overwear and avoid early damage.

► Travel Comfort Solution

- Oriented massive pattern block to provide excellent handling and drive stability even during fast turning.

► Transport Efficiency Solution

- Enable special production line of the most advanced equipment to ensure ride comfort.

► All-weather Grip Solution

- Optimized pattern block shape to improve grip significantly on both dry and wet roads , and ensure driving safety.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	35"	265/35R18	XL	BSW	9.5	-	97Y	730	1609	346	50	8	271	643
2	40"	235/40R18	XL	BSW	8.5	-	95W	690	1521	342	50	8	241	645
3	40"	245/40R18	XL	BSW	8.5	-	97W	730	1609	340	50	7	248	653
4	40"	275/40R18	XL	BSW	9.5	-	103W	875	1929	340	50	7	278	677
5	50"	255/50R18	XL	BSW	8.0	-	106W	950	2094	340	50	7	265	713
6	55"	255/55R18	XL	BSW	8.0	-	109W	1030	2271	344	50	8	265	737

► Low Failure Solution

- High turn-up belt structure combined with specially designed bead curve can effectively avoid early damage.

► Transport Efficiency Solution

- Silicious compound to enhance low rolling resistance.
- Asymmetric pattern to provide excellent handling performance.

► Noise Reduction Solution

- Optimized pattern block shape to improve grip significantly on both dry and wet roads , and ensure driving safety.

► All-weather Grip Solution

- Equipped with M-arc crown stabilizing technology, achieves more uniform wear between tread and ground. bringing more powerful acceleration performance.

► Travel Comfort Solution

- Advanced production process and equipment to provide excellent dynamic balance performance.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	30"	245/30R20	XL	BSW	8.5	-	95W	690	1521	340	50	8	248	656
2	30"	265/30R19	XL	BSW	9.5	-	93Y	650	1433	340	50	8	271	643
3	30"	275/30R19	XL	BSW	9.5	-	96Y	710	1565	340	50	8	278	649
4	30"	275/30R20	XL	BSW	9.5	-	97Y	730	1609	340	50	8	278	674
5	30"	245/30R20	XL	BSW	8.5	-	97W	730	1609	340	50	8	248	656
6	35"	215/35R19	XL	BSW	7.5	-	85Y	515	1135	340	50	8	218	633
7	35"	225/35R19	XL	BSW	8.0	-	88Y	560	1235	340	50	8	230	641
8	35"	225/35R20	XL	BSW	8.0	-	90Y	600	1323	340	50	8	230	666
9	35"	225/35R20	XL	BSW	8.0	-	93Y	650	1433	340	50	8	230	666
10	35"	235/35R19	XL	BSW	8.5	-	91Y	615	1356	340	50	8	241	647
11	35"	245/35R19	XL	BSW	8.5	-	93Y	650	1433	340	50	8	248	655
12	35"	245/35R20	XL	BSW	8.5	-	95Y	690	1521	340	50	8	248	680
13	35"	255/35R18	XL	BSW	9.0	-	94Y	670	1477	340	50	8	260	635
14	35"	255/35R20	XL	BSW	9.0	-	97Y	730	1609	340	50	8	260	686
15	35"	265/35R18	XL	BSW	9.5	-	97Y	730	1609	340	50	8	271	643
16	35"	255/35R20	XL	BSW	9.0	-	102Y	850	1874	340	50	8	260	686
17	40"	205/40R17	XL	BSW	7.5	-	84W	500	1102	340	50	8	212	596
18	40"	215/40R18	XL	BSW	7.5	-	89W	580	1279	340	50	8	218	629
19	40"	225/40R18	XL	BSW	8.0	-	92W	630	1389	340	50	8	230	637
20	40"	225/40R19	XL	BSW	8.0	-	93W	650	1433	340	50	8	230	663
21	40"	235/40R18	XL	BSW	8.5	-	95W	690	1521	340	50	8	241	645
22	40"	245/40R18	XL	BSW	8.5	-	97W	730	1609	340	50	8	248	653
23	40"	245/40R19	XL	BSW	8.5	-	98W	750	1653	340	50	8	248	679
24	40"	255/40R17	XL	BSW	9.0	-	98W	750	1653	340	50	8	260	636
25	40"	255/40R19	XL	BSW	9.0	-	100W	800	1764	340	50	8	260	687
26	40"	275/40R20	XL	BSW	9.5	-	106W	950	2094	340	50	8	278	728
27	45"	215/45R17	XL	BSW	7.0	-	91W	615	1356	340	50	8	213	626
28	45"	225/45R17	XL	BSW	7.5	-	94W	670	1477	340	50	8	225	634
29	45"	225/45R18	XL	BSW	7.5	-	95W	690	1521	340	50	8	225	659
30	45"	235/45R17	XL	BSW	8.0	-	97W	730	1609	340	50	8	236	644
31	45"	245/45R17	XL	BSW	8.0	-	99W	775	1709	340	50	8	243	652
32	45"	245/45R18	XL	BSW	8.0	-	100W	800	1764	340	50	8	243	677
33	45"	245/45R19	XL	BSW	8.0	-	102W	850	1874	340	50	8	243	703
34	45"	245/45R20	SL	BSW	8.0	-	99W	775	1709	350	51	8	243	728
35	45"	255/45R18	XL	BSW	8.5	-	103W	875	1929	340	50	8	255	687
36	45"	255/45R19	XL	BSW	8.5	-	104W	900	1984	340	50	8	255	713
37	45"	185/45R15	SL	BSW	6.0	-	75V	387	853	350	51	7.4	183	547
38	45"	195/45R17	XL	BSW	6.5	-	85W	515	1135	340	50	7.4	195	608
39	45"	195/45R17	SL	BSW	6.5	-	81W	462	1019	350	51	7.4	195	608
40	50"	205/50R17	XL	BSW	6.5	-	93W	650	1433	340	50	8	214	638
41	50"	215/50R17	XL	BSW	7.0	-	95W	690	1521	340	50	8	226	648
42	50"	225/50R17	XL	BSW	7.0	-	98W	750	1653	340	50	8	233	658
43	50"	235/50R17	XL	BSW	7.5	-	100W	800	1764	340	50	8	245	668
44	50"	235/50R18	XL	BSW	7.5	-	101W	825	1819	340	50	8	245	693
45	50"	245/50R18	XL	BSW	7.5	-	104W	900	1984	340	50	8	253	703
46	50"	255/50R19	XL	BSW	8.0	-	107W	975	2149	340	50	8	265	739
47	50"	205/50R17	XL	BSW	6.5	-	93W	650	1433	340	50	8	214	638
48	50"	215/50R17	XL	BSW	7.0	-	95W	690	1521	340	50	8	226	648
49	55"	205/55R16	SL	BSW	6.5	-	91W	615	1356	350	51	8	214	632
50	55"	215/55R16	XL	BSW	7.0	-	97W	730	1609	340	50	8	226	642
51	55"	225/55R16	XL	BSW	7.0	-	99W	775	1709	340	50	8	233	654
52	55"	225/55R17	XL	BSW	7.0	-	101W	825	1819	340	50	8	233	680
53	55"	235/55R17	XL	BSW	7.5	-	103W	875	1929	340	50	8	245	690
54	55"	255/55R18	XL	BSW	8.0	-	109W	1030	2271	340	50	8	265	737
55	55"	205/55R16	XL	BSW	6.5	-	94W	670	1477	340	50	8	214	632
56	55"	205/55R16	SL	BSW	6.5	-	91W	615	1356	350	51	8	214	632
57	55"	205/55R16	XL	BSW	6.5	-	94W	670	1477	340	50	8	214	632
58	55"	215/55R16	XL	BSW	7.0	-	97W	730	1609	340	50	8	226	642
59	55"	225/55R17	XL	BSW	7.0	-	101W	825	1819	340	50	8	233	680
60	55"	235/60R16	XL	BSW	7.0	-	104W	900	1984	340	50	8	240	688
61	55"	235/60R18	XL	BSW	7.0	-	107W	975	2149	340	50	8	240	739

UHP

MOZZO SPORT RSC

▶ All-weather Grip Solution

- Asymmetric pattern design improves tire steering performance, suitable for all-season use.

▶ Travel Comfort Solution

- The low heat generation formula can effectively reduce the heat generation during driving.
- Strengthen the internal structure design to improve the tire strength and impact resistance.

▶ Safety Protection Solution

- Reinforced tire sidewall design ensures safe travel of 100KM with 0 bar tire pressure.
- Wide bead design to ensure safe driving and ensure that the tire will not fall off the rim when driving at 0 tire pressure.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	35"	275/35RF19	SL	BSW	9.5	-	96W	710	1565	350	51	8	278	675
2	40"	245/40RF19	SL	BSW	8.5	-	94W	670	1477	350	51	8	248	679
* 3	40"	255/40RF18	SL	BSW	9.0	-	95W	690	1521	350	51	8	260	661
4	40"	275/40RF19	SL	BSW	9.5	-	101W	825	1819	350	51	8	278	703
5	45"	225/45RF18	SL	BSW	7.5	-	91W	615	1356	350	51	8	225	659
6	45"	245/45RF18	SL	BSW	8.0	-	96W	710	1565	350	51	8	243	677
7	45"	245/45RF19	SL	BSW	8.0	-	98W	750	1653	350	51	8	243	703
8	50"	225/50RF17	SL	BSW	7.0	-	94W	670	1477	350	51	8	233	658
9	50"	245/50RF18	SL	BSW	7.5	-	100W	800	1764	350	51	8	253	703
10	50"	255/50RF19	SL	BSW	8.0	-	103W	875	1929	350	51	8	265	739
11	55"	225/55RF17	SL	BSW	7.0	-	97W	730	1609	350	51	8	233	680
*12	55"	235/55RF19	SL	BSW	7.5	-	101W	825	1819	350	51	8	245	741

(The product marked with * is MOZZO SPORT S2 pattern)

UHP

MOZZO STX

▶ Low Mileage Solution

- High abrasion tread compound combined with widened treadwidth to enhance expected mileage markedly.

▶ Transport Efficiency Solution

- Wide middle pattern block to enhance excellent riding stability at high speed.

▶ Low Failure Solution

- Specially designed bead curve can effectively protect against overwear and avoid early damage.

▶ All-weather Grip Solution

- Fair shaped pattern design to improve drainage performance and low noise.

▶ Travel Comfort Solution

- Advanced production process and equipment to provide excellent dynamic balance performance.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	30"	245/30R22	XL	BSW	8.5	-	92W	630	1389	340	50	8.7	248	707
2	30"	255/30R24	XL	BSW	9.0	-	97W	730	1609	340	50	8.7	260	764
3	30"	295/30R26	XL	BSW	10.5	-	107W	975	2149	340	50	8.7	301	838
4	30"	305/30R26	XL	BSW	11.0	-	109V	1030	2271	340	50	8.7	313	844
5	35"	265/35R22	XL	BSW	9.5	-	102V	850	1874	340	50	8.7	271	745
6	35"	295/35R24	XL	BSW	10.5	-	110V	1060	2337	340	50	8.7	301	816
7	35"	305/35R24	XL	BSW	11.0	-	112V	1120	2469	340	50	8.7	313	824
8	40"	245/40R20	XL	BSW	8.5	-	99W	775	1709	340	50	8.7	248	704
9	40"	265/40R22	XL	BSW	9.5	-	106V	950	2094	340	50	8.7	271	771
10	40"	275/40R20	XL	BSW	9.5	-	106V	950	2094	340	50	8.7	278	728
11	40"	275/40R20	XL	BSW	9.5	-	106W	950	2094	340	50	8.7	278	728
12	40"	305/40R22	XL	BSW	11.0	-	114V	1180	2601	340	50	8.7	313	803
13	45"	275/45R20	XL	BSW	9.0	-	110V	1060	2337	340	50	8.7	273	756
14	45"	275/45R20	XL	BSW	9.0	-	110W	1060	2337	340	50	8.7	273	756
15	45"	285/45R22	XL	BSW	9.5	-	114V	1180	2601	340	50	8.7	285	815
16	45"	305/45R22	XL	BSW	10.0	-	118V	1320	2910	340	50	8.7	303	833
17	50"	265/50R20	XL	BSW	8.5	-	111V	1090	2403	340	50	8.7	277	774
18	50"	285/50R20	XL	BSW	9.0	-	116V	1250	2756	340	50	8.7	297	794
19	55"	275/55R20	XL	BSW	8.5	-	117V	1285	2833	340	50	8.7	284	810
20	60"	225/60R17	XL	BSW	6.5	-	103V	875	1929	340	50	8.7	228	702
21	60"	275/60R20	SL	BSW	8.0	-	115V	1215	2679	350	51	8.7	279	838
22	65"	225/65R17	XL	BSW	6.5	-	106V	950	2094	340	50	8.7	228	724

HP

MOZZO TOURING

▶ Long Mileage Solution

- Deepened pattern depth compound combined with deepened groove width to enhance expected mileage markedly.

▶ Low Failure Solution

- High turn-up belt structure to avoid early damage.

▶ Noise Reduction Solution

- Optimized pattern pitch to reduce rolling noise.

▶ All-weather Grip Solution

- Four straight mian pattern grooves to improve drainage performance , and ensure driving safety.

▶ Travel Comfort Solution

- Enable special production line of the most advanced equipment to ensure ride comfort.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	50"	215/50R17	XL	BSW	7.0	-	95V	690	1521	340	50	8.7	226	648
2	50"	225/50R17	SL	BSW	7.0	-	94V	670	1477	350	51	8.7	233	658
3	55"	205/50R16	SL	BSW	6.5	-	91V	615	1356	350	51	8.7	214	632
4	55"	215/55R17	SL	BSW	7.0	-	94V	670	1477	350	51	8.7	226	668
5	55"	235/55R18	SL	BSW	7.5	-	100V	800	1764	350	51	8.7	245	715
6	55"	215/55R17	XL	BSW	7.0	-	98V	750	1653	340	50	8.7	226	668
7	60"	175/60R13	SL	BSW	5.0	-	77H	412	908	350	51	8.7	177	540
8	60"	185/60R14	SL	BSW	5.5	-	82H	475	1047	350	51	8.7	189	578
9	60"	185/60R15	SL	BSW	5.5	-	84H	500	1102	350	51	8.7	189	603
10	60"	195/60R14	SL	BSW	6.0	-	86H	530	1168	350	51	8.7	241	590
11	60"	195/60R15	SL	BSW	6.0	-	88H	560	1235	350	51	8.7	241	615
12	60"	205/60R16	SL	BSW	6.0	-	92V	630	1389	350	51	8.7	241	652
13	60"	215/60R16	SL	BSW	6.5	-	95V	690	1521	350	51	8.7	241	664
14	60"	225/60R16	SL	BSW	6.5	-	98H	750	1653	350	51	8.7	241	676
15	65"	155/65R13	SL	BSW	4.5	-	73T	365	805	350	51	8.2	241	632
16	65"	165/65R13	SL	BSW	5.0	-	77T	412	908	350	51	8.2	241	544
17	65"	175/65R14	SL	BSW	5.0	-	82H	475	1047	350	51	8.7	241	584
18	65"	185/65R14	SL	BSW	5.5	-	86H	530	1168	350	51	8.7	241	596
19	65"	195/65R15	SL	BSW	6.0	-	91H	615	1356	350	51	8.7	241	635
20	65"	205/65R15	XL	BSW	6.0	-	99T	775	1709	340	50	8.7	241	647
21	65"	205/65R16	SL	BSW	6.0	-	95V	690	1521	350	51	8.7	241	672
22	65"	215/65R16	SL	BSW	6.5	-	98H	750	1653	350	51	8.7	241	686
23	65"	225/65R17	SL	BSW	6.5	-	102H	850	1874	350	51	8.7	241	724
24	65"	185/65R15	SL	BSW	5.5	-	88H	560	1235	350	51	8.7	241	621
25	70"	165/70R13	SL	BSW	5.0	-	79T	437	963	350	51	8.2	241	562
26	70"	175/70R13	SL	BSW	5.0	-	82T	475	1047	350	51	8.7	241	576
27	70"	175/70R14	SL	BSW	5.0	-	84T	500	1102	350	51	8.7	241	602
28	70"	185/70R14	SL	BSW	5.5	-	88T	560	1235	350	51	8.7	241	616
29	70"	195/70R14	SL	BSW	6.0	-	91T	615	1356	350	51	8.7	241	630
30	70"	205/70R15	SL	BSW	6.0	-	96T	710	1565	350	51	8.7	241	669
31	70"	215/70R15	SL	BSW	6.5	-	98T	750	1653	350	51	8.7	241	683

HP

MOZZO 4 SEASON

▶ All-weather Grip Solution

- Fully connected tread shoulder groove and 3D steel sheet design ensure good drainage capacity, traction and lateral stability in rain and snow weather.

- Professional four seasons tire formula can not only ensure the stability and durability of driving at high temperature in summer, but also show excellent wet/snow grip and safety in severe snow conditions in winter.

▶ Transport Efficiency Solution

- Single-oriented pattern design and high-density pattern design have stronger grip and braking performance.

▶ Noise Reduction Solution

- Optimized pattern pitch to reduce rolling noise.

▶ Travel Comfort Solution

- Special internal structure can better withstand impact and absorb vibration, improve the driving stability and driving comfort.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	40"	225/40R18	XL	BSW	8.0	-	92W	630	1389	340	50	8.3	230	637
2	45"	195/45R16	XL	BSW	6.5	-	84V	500	1102	340	50	8.3	195	582
3	45"	205/45R17	XL	BSW	7.0	-	88W	560	1235	340	50	8.3	206	616
4	45"	225/45R17	XL	BSW	7.5	-	94W	670	1477	340	50	8.3	225	634
5	50"	195/50R15	SL	BSW	6.0	-	82V	475	1047	350	51	8.3	201	577
6	55"	185/55R15	XL	BSW	6.0	-	86H	530	1168	340	50	8.3	194	585
7	55"	195/55R15	XL	BSW	6.0	-	89V	580	1279	340	50	8.3	201	595
8	55"	205/55R16	SL	BSW	6.5	-	91H	615	1356	350	51	8.7	214	632
9	55"	205/55R16	XL	BSW	6.5	-	94V	670	1477	340	50	8.3	214	632
10	55"	215/55R16	XL	BSW	7.0	-	97V	730	1609	340	50	8.3	226	642
11	55"	215/55R18	XL	BSW	7.0	-	99V	775	1709	340	50	8.3	226	693
12	60"	185/60R14	XL	BSW	5.5	-	86H	530	1168	340	50	8.3	189	578
13	60"	185/60R15	XL	BSW	5.5	-	88V	560	1235	340	50	8.3	189	603
14	60"	195/60R15	XL	BSW	6.0	-	92V	630	1389	340	50	8.3	201	615
15	65"	175/65R14	XL	BSW	5.0	-	86H	530	1168	340	50	8.3	177	584
16	65"	185/65R15	XL	BSW	5.5	-	92T	630	1389	340	50	8.3	189	621
17	65"	185/65R15	XL	BSW	5.5	-	92V	630	1389	340	50	8.3	189	621
18	65"	195/65R15	SL	BSW	6.0	-	91H	615	1356	350	51	8.3	201	635
19	65"	195/65R15	XL	BSW	6.0	-	95V	690	1521	340	50	8.3	201	635
20	70"	165/70R14	XL	BSW	5.0	-	85T	515	1135	340	50	8.3	170	588

HP

MOZZO 4S+

▶ Low Failure Solution

- High turn-up belt structure to avoid early damage.

▶ Transport Efficiency Solution

- Silicious compound to enhance low rolling resistance.

▶ Noise Reduction Solution

- Optimized pattern pitch to reduce rolling noise.

▶ All-weather Grip Solution

- Special compound combined with zigzag steel disc to enhance outstanding wet grip.

▶ Travel Comfort Solution

- Enable special production line of the most advanced equipment to ensure ride comfort.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	40"	205/40R17	XL	BSW	7.5	-	84W	500	1102	340	50	7.8	212	596
2	45"	205/45R16	SL	BSW	7.0	-	83V	487	1074	350	51	7.8	206	590
3	45"	205/45R16	XL	BSW	7.0	-	87W	545	1201	340	50	7.8	206	590
4	50"	195/50R15	SL	BSW	6.0	-	82V	475	1047	350	51	7.8	201	577
5	50"	205/50R16	SL	BSW	6.5	-	87V	545	1201	350	51	7.8	214	612
6	55"	195/55R15	SL	BSW	6.0	-	85H	515	1135	350	51	7.8	201	595
7	55"	195/55R15	SL	BSW	6.0	-	85V	515	1135	350	51	7.8	201	595
8	55"	195/55R16	XL	BSW	6.0	-	91H	615	1356	340	50	7.8	201	620
9	55"	195/55R16	XL	BSW	6.0	-	91V	615	1356	340	50	7.8	201	620
10	55"	205/55R16	SL	BSW	6.5	-	91H	615	1356	350	51	7.8	214	632
11	55"	205/55R16	SL	BSW	6.5	-	91V	615	1356	350	51	7.8	214	632
12	60"	195/60R15	SL	BSW	6.0	-	88H	560	1235	350	51	7.8	201	615
13	60"	195/60R15	SL	BSW	6.0	-	88V	560	1235	350	51	7.8	201	615
14	60"	205/60R14	SL	BSW	6.0	-	88V	560	1235	350	51	7.8	209	602
15	60"	205/60R15	SL	BSW	6.0	-	91H	615	1356	350	51	7.8	209	627
16	60"	205/60R15	SL	BSW	6.0	-	91V	615	1356	350	51	7.8	209	627
17	60"	205/60R16	SL	BSW	6.0	-	92H	630	1389	350	51	7.8	209	652
18	60"	205/60R16	SL	BSW	6.0	-	92V	630	1389	350	51	7.8	209	652
19	60"	215/60R16	SL	BSW	6.5	-	95H	690	1521	350	51	7.8	221	664
20	60"	215/60R16	SL	BSW	6.5	-	95V	690	1521	350	51	7.8	221	664
21	60"	215/60R16	XL	BSW	6.5	-	99V	775	1709	340	50	7.8	221	664
22	60"	225/60R16	SL	BSW	6.5	-	98H	750	1653	350	51	7.8	228	676
23	60"	225/60R16	XL	BSW	6.5	-	102V	850	1874	340	50	7.8	228	676
24	65"	195/65R15	SL	BSW	6.0	-	91H	615	1356	350	51	7.8	201	635
25	65"	195/65R15	SL	BSW	6.0	-	91V	615	1356	350	51	7.8	201	635
26	65"	205/65R15	SL	BSW	6.0	-	94H	670	1477	350	51	7.8	209	647
27	65"	205/65R15	SL	BSW	6.0	-	94V	670	1477	350	51	7.8	209	647
28	70"	195/70R14	SL	BSW	6.0	-	91T	615	1356	350	51	7.8	201	630

HP

MOZZO 4S

▶ Low Failure Solution

- High turn-up belt structure to avoid early damage.

▶ Transport Efficiency Solution

- Silicious compound to enhance low rolling resistance.

▶ Noise Reduction Solution

- Optimized pattern pitch to reduce rolling noise.

▶ All-weather Grip Solution

- Special compound combined with zigzag steel disc to enhance outstanding wet grip.

▶ Travel Comfort Solution

- Enable special production line of the most advanced equipment to ensure ride comfort.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	40"	165/40R16	XL	BSW	6.0	-	70V	335	739	340	50	7.2	170	538
2	40"	165/40R16	XL	BSW	6.0	-	73V	365	805	340	50	7.2	170	538
3	45"	165/45R16	XL	BSW	5.5	-	74V	375	827	340	50	7.2	165	554
4	50"	165/50R15	SL	BSW	5.0	-	72V	355	783	350	51	7.4	170	547
5	55"	155/55R14	SL	BSW	5.0	-	69H	325	716	350	51	7.2	162	526
6	55"	165/55R14	SL	BSW	5.0	-	72H	355	783	350	51	7.4	170	538
7	55"	165/55R15	SL	BSW	5.0	-	75V	387	853	350	51	7.2	170	563
8	55"	185/55R15	SL	BSW	6.0	-	82H	475	1047	350	51	7.4	194	585
9	55"	185/55R15	SL	BSW	6.0	-	82V	475	1047	350	51	7.4	194	585
10	60"	165/60R14	SL	BSW	5.0	-	75H	387	853	350	51	7.4	170	554
11	60"	185/60R14	SL	BSW	5.5	-	82H	475	1047	350	51	7.4	189	578
12	60"	185/60R15	SL	BSW	5.5	-	84H	500	1102	350	51	7.4	189	603
13	60"	185/60R15	XL	BSW	5.5	-	88H	560	1235	340	50	7.4	189	603
14	60"	165/60R14	SL	BSW	5.0	-	95H	387	853	350	51	7.4	170	554
15	65"	175/65R14	SL	BSW	5.0	-	82T	475	1047	350	51	7.4	177	584
16	65"	175/65R14	SL	BSW	5.0	-	82H	475	1047	350	51	7.4	177	584
17	65"	175/65R14	XL	BSW	5.0	-	86T	530	1168	340	50	7.4	177	584
18	65"	175/65R15	SL	BSW	5.0	-	84H	500	1102	350	51	7.4	177	609
19	65"	185/65R14	SL	BSW	5.5	-	86H	530	1168	350	51	7.4	189	596
20	65"	185/65R15	SL	BSW	5.5	-	88H	560	1235	350	51	7.4	189	621
21	65"	185/65R15	SL	BSW	5.5	-	88T	560	1235	350	51	7.4	189	621
22	65"	185/65R15	XL	BSW	5.5	-	92T	630	1389	340	50	7.4	189	621
23	65"	185/65R14	SL	BSW	5.5	-	86T	530	1168	350	51	7.4	189	596
24	65"	185/65R14	XL	BSW	5.5	-	90S	600	1323	340	50	7.4	189	596
25	70"	145/70R12	SL	BSW	4.5	-	69T	325	716	350	51	7.2	150	509
26	70"	145/70R13	SL	BSW	4.5	-	71T	345	761	350	51	7.2	150	534
27	70"	155/70R13	SL	BSW	4.5	-	75T	387	853	350	51	7.4	157	548
28	70"	165/70R13	SL	BSW	5.0	-	79T	437	963	350	51	7.4	170	562
29	70"	165/70R13	XL	BSW	5.0	-	83T	487	1074	340	50	7.4	170	562
30	70"	165/70R14	SL	BSW	5.0	-	81T	462	1019	350	51	7.4	170	588
31	70"	165/70R14	XL	BSW	5.0	-	85T	515	1135	340	50	7.4	170	588
32	70"	175/70R13	SL	BSW	5.0	-	82T	475	1047	350	51	7.4	177	576
33	70"	175/70R14	SL	BSW	5.0	-	84T	500	1102	350	51	7.4	177	602
34	70"	175/70R14	XL	BSW	5.0	-	88T	560	1235	351	50	7.4	177	602
35	70"	185/70R13	SL	BSW	5.5	-	86T	530	1168	350	51	7.4	189	590
36	70"	185/70R14	SL	BSW	5.5	-	88T	560	1235	350	51	7.4	189	616
37	75"	175/75R13	SL	BSW	5.0	-	84T	500	1102	350	51	5.7	177	593
38	75"	175/75R14	SL	BSW	5.0	-	86T	530	1168	350	51	5.7	177	618
39	80"	155/80R13	SL	BSW	4.5	-	79T	437	963	350	51	7.4	157	578

SUV/VAN/LT/ 4X4-OFFROAD SERIES



HP

MOZZO S360

► Low Failure Solution

- Special pattern block angle to ensure uniform wear.

► Transport Efficiency Solution

- Silicious compound to enhance low rolling resistance.
- Special shoulder pattern block to enhance excellent riding stability under high speed.

► Travel Comfort Solution

- Enable special production line of the most advanced equipment to ensure ride comfort.

► Noise Reduction Solution

- Optimized pattern pitch to reduce rolling noise.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	45"	235/45R18	XL	BSW	8.0	-	98V	750	1653	340	50	8.2	236	669
2	55"	215/55R17	SL	BSW	7.0	-	94V	670	1477	350	51	8.2	226	668
3	55"	225/55R18	SL	BSW	7.0	-	98V	750	1653	350	51	8.2	233	705
4	55"	215/55R18	XL	BSW	7.0	-	99V	775	1709	340	50	8.2	226	693
5	55"	205/55R17	XL	BSW	6.5	-	95V	690	1521	340	50	8.2	214	658
6	60"	225/60R18	SL	BSW	6.5	-	100H	800	1764	350	51	8.2	228	727
7	60"	215/60R17	SL	BSW	6.5	-	96V	710	1565	350	51	8.2	221	690
8	60"	195/60R16	SL	BSW	6.0	-	89V	580	1279	350	51	8.2	201	640
9	60"	225/60R17	XL	BSW	6.5	-	103V	875	1929	340	50	8.2	228	702
10	65"	225/65R17	SL	BSW	6.5	-	102H	850	1874	350	51	8.2	228	724
11	65"	215/65R17	SL	BSW	6.5	-	99V	775	1709	350	51	8.2	221	712

HT

TRAVIA H/T

► Low Mileage Solution

- High abrasion tread compound combined with widened treadwidth to enhance expected mileage markedly.

► Transport Efficiency Solution

- Professional shoulder block to enhance excellent riding stability at high speed.

► Noise Reduction Solution

- Wide groove compound combined with corrugated steel disco to enhance expected mileage markedly



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	55"	215/55R18	SL	OWL	7.0	-	95H	690	1521	350	51	9.4	226	693
2	55"	215/55R18	XL	OWL	7.0	-	99V	775	1709	340	50	9.4	226	693
3	60"	215/60R17	SL	OWL	6.5	-	96H	710	1565	350	51	9.4	221	690
4	60"	235/60R18	SL	OWM	7.0	-	103H	875	1929	350	51	9.4	240	739
5	60"	235/60R18	SL	OWL	7.0	-	103V	875	1929	350	51	9.4	240	739
6	65"	235/65R17	SL	OWL	7.0	-	104T	900	1984	350	51	9.4	240	738
7	65"	245/65R17	SL	OWL	7.0	-	107T	975	2149	350	51	9.8	248	750
8	65"	265/65R17	SL	OWL	8.0	-	112H	1120	2469	350	51	9.8	272	776
9	70"	215/70R16	SL	OWL	6.5	-	100H	800	1764	350	51	9.4	221	708
10	70"	225/70R16	SL	OWL	6.5	-	103T	875	1929	350	51	9.4	228	722
11	70"	235/70R16	SL	OWL	7.0	-	106T	950	2094	350	51	9.4	240	736
12	70"	245/70R16	XL	BSW	7.0	-	111T	1090	2403	340	50	9.8	248	750
13	70"	245/70R16	SL	OWL	7.0	-	107T	975	2149	350	51	9.8	248	750
14	70"	265/70R16	SL	OWL	8.0	-	112T	1120	2469	350	51	9.8	272	778
15	70"	265/70R17	SL	OWL	8.0	-	115T	1215	2679	350	51	9.8	272	804
16	70"	LT265/70R17	-	BSW	8.0	10	121/118R	1450/1320	3195/2910	550	80	11.3	272	804
17	70"	LT285/70R17	-	BSW	8.5	8	121/118S	1450/1320	3195/2910	450	65	11.3	292	832
18	75"	235/75R15	XL	OWL	6.5	-	109T	1030	2271	340	50	9.4	235	733
19	75"	265/75R16	SL	OWL	7.5	-	116T	1250	2756	350	51	9.8	267	804
20	75"	31X10.50R15LT	-	BSW	8.5	6	109R	1030	2270	350	50	11.3	268	775
21	75"	LT215/75R15	-	OWL	6.0	8	106/103R	950/875	2095/1930	450	65	11.3	216	703
22	75"	LT225/75R16	-	BSW	6.0	10	115/112R	1215/1120	2680/2470	550	80	11.3	223	744
23	75"	LT235/75R15	-	OWL	6.5	10	116/113S	1250/1150	2755/2535	550	80	11.3	235	733
24	75"	LT245/75R16	-	BSW	7.0	10	120/116R	1400/1250	3085/2755	550	80	11.3	248	774
25	75"	LT245/75R17	-	BSW	7.0	10	121/118R	1450/1320	3195/2910	550	80	11.3	248	800
26	75"	LT265/75R16	-	BSW	7.5	10	123/120R	1550/1400	3415/3085	550	80	11.3	267	804
27	80"	LT235/80R17	-	BSW	6.5	10	120/117R	1400/1285	3085/2835	550	80	11.3	235	808
28	85"	LT235/85R16	-	BSW	6.5	10	120/116R	1400/1250	3085/2755	550	80	11.3	235	806

AT

TRAVIA A/T

► Low Mileage Solution

- High abrasion tread compound combined with widened treadwidth to enhance expected mileage markedly.

► Low Failure Solution

- Specially designed shoulder curve can effectively protect against overwear and avoid early damage.

► All-weather Grip Solution

- Multiple Wide grooves to provide excellent drainage performance and wet grip.

► High Load Solution

- Reinforced tyre body and band structure to provide stronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	60"	205/60R16	SL	OWL	6.0	-	92H	630	1389	350	51	8.2	209	652
2	65"	205/65R15	SL	OWL	6.0	-	94H	670	1477	350	51	8.2	209	647
3	65"	235/65R17	SL	OWL	7.0	-	104T	900	1984	350	51	10.5	240	738
4	65"	245/65R17	SL	OWL	7.0	-	107T	975	2149	350	51	10.5	248	750
5	65"	265/65R17	SL	OWL	8.0	-	112H	1120	2469	350	51	10.5	272	776
6	70"	205/70R15	SL	OWL	6.0	-	96T	710	1565	350	51	8.2	209	669
7	70"	215/70R16	SL	OWL	6.5	-	100H	800	1764	350	51	10.5	221	708
8	70"	225/70R16	SL	OWL	6.5	-	103T	875	1929	350	51	10.5	228	722
9	70"	235/70R16	SL	OWL	7.0	-	106T	950	2094	350	51	10.5	240	736
10	70"	245/70R16	XL	BSW	7.0	-	111T	1090	2403	340	50	10.5	248	750
11	70"	245/70R16	SL	OWL	7.0	-	107T	975	2149	350	51	10.5	248	750
12	70"	265/70R16	SL	OWL	8.0	-	112T	1120	2469	350	51	10.5	272	778
13	70"	265/70R17	SL	OWL	8.0	-	115T	1215	2679	350	51	10.5	272	804
14	70"	LT265/70R17	-	OWL	8.0	10	121/118R	1450/1320	3195/2910	550	80	12.5	272	804
15	70"	LT285/70R17	-	OWL	8.5	8	121/118S	1450/1320	3195/2910	450	65	12.5	292	832
16	75"	205/75R15	SL	OWL	6.0	-	96T	710	1565	350	51	8.2	209	669
17	75"	215/75R15	SL	OWL	6.0	-	100T	800	1764	350	51	10.5	216	703
18	75"	235/75R15	XL	OWL	6.5	-	109T	1030	2271	340	50	10.5	235	733
19	75"	265/75R16	SL	OWL	7.5	-	116T	1250	2756	350	51	10.5	267	804
20	75"	31X10.50R15LT	-	OWL	8.5	6	109R	1030	2270	350	50	12.5	268	775
21	75"	LT225/75R16	-	OWL	6.0	10	115/112R	1215/1120	2680/2470	550	80	12.5	223	744
22	75"	LT235/75R15	-	OWL	6.5	10	116/113S	1250/1150	2755/2535	550	80	12.5	235	733
23	75"	LT245/75R16	-	OWL	7.0	10	120/116R	1400/1250	3085/2755	550	80	12.5	248	774
24	75"	LT245/75R17	-	OWL	7.0	10	121/118R	1450/1320	3195/2910	550	80	12.5	248	800
25	75"	LT265/75R16	-	OWL	7.5	10	123/120R	1550/1400	3415/3085	550	80	12.5	267	804
26	75"	LT285/75R16	-	OWL	8.0	10	126/123R	1700/1550	3750/3415	550	80	12.5	286	834
27	80"	LT235/80R17	-	OWL	6.5	10	120/117R	1400/1285	3085/2835	550	80	12.5	235	808
28	85"	LT235/85R16	-	OWL	6.5	10	120/116R	1400/1250	3085/2755	550	80	12.5	235	806

MT

TRAVIA M/T

▶ Long Mileage Solution

- High abrasion tread compound to enhance expected mileage markedly.

▶ Low Failure Solution

- Specially designed shoulder curve can effectively protect against overwear and avoid early damage.

▶ High Load Solution

- Reinforced tyre body and band structure to provide stronger load capacity



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity	Max. Load Capacity	Max. Air Pressure	Max. Air Pressure	Tread Depth	Section Width	Overall Diameter
1	50"	33X12.50R18LT	-	OWL	10.0	10	118Q	1320	2910	450	65	15	318	826
2	50"	33X12.50R20LT	-	OWL	10.0	10	114Q	1180	2600	450	65	15	318	826
3	60"	35X12.50R20LT	-	OWL	10.0	10	121Q	1450	3195	450	65	15	318	877
4	70"	LT265/70R17	-	OWL	8.0	10	121/118Q	1450/1320	3195/2910	550	80	15	272	804
5	70"	LT285/70R17	-	OWL	8.5	10	121/118Q	1450/1320	3195/2910	550	80	15	292	832
6	75"	31X10.50R15LT	-	OWL	8.5	6	109Q	1030	2270	350	50	15	268	775
7	75"	LT245/75R16	-	OWL	7.0	10	120/116Q	1400/1250	3085/2755	550	80	15	248	774
8	75"	LT265/75R16	-	OWL	7.5	10	123/120Q	1550/1400	3415/3085	550	80	15	267	804
9	75"	LT285/75R16	-	OWL	8.0	10	126/123Q	1700/1550	3750/3415	550	80	15	286	834

VAN

TRAVIA VAN

▶ Long Mileage Solution

- High abrasion tread compound to enhance expected mileage markedly.

▶ All-weather Grip Solution

- Three straight mian pattern grooves to enhance outstanding wet grip.

▶ High Load Solution

- Reinforced tyre body and band structure to provide stronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	60"	215/60R16C	-	BSW	6.5	6	103/101T	875/825	1929/1819	375	54	9.7	221	664
2	65"	175/65R14C	-	BSW	5.0	6	90/88T	600/560	1323/1235	375	54	9.7	177	584
3	65"	205/65R16C	-	BSW	6.0	8	107/105T	975/925	2149/2039	475	69	9.7	209	672
4	65"	215/65R16C	-	BSW	6.5	8	109/107R	1030/975	2271/2149	475	69	9.7	221	686
5	65"	225/65R16C	-	BSW	6.5	8	112/110R	1120/1060	2469/2337	475	69	9.7	228	698
6	65"	235/65R16C	-	BSW	7.0	8	115/113R	1215/1150	2679/2535	475	69	9.7	240	712
7	70"	165/70R13C	-	BSW	5.0	6	88/86R	560/530	1235/1168	375	54	9.7	170	562
8	70"	165/70R14C	-	BSW	5.0	6	89/87R	580/545	1279/1201	375	54	9.7	170	588
9	70"	175/70R14C	-	BSW	5.0	6	95/93R	690/650	1521/1433	375	54	9.7	177	602
10	70"	175/70R14LT	-	BSW	5.0	8	93/90S	650/600	1433/1323	450	-	9.7	177	602
11	70"	195/70R15C	-	BSW	6.0	8	104/102R	900/850	1984/1874	450	65	9.7	201	655
12	70"	195/70R15C	-	BSW	6.0	10	104/101R	900/825	1984/1819	550	-	9.7	201	655
13	70"	205/70R15C	-	BSW	6.0	8	106/104R	950/900	2094/1984	450	65	9.7	209	669
14	70"	215/70R15C	-	BSW	6.5	8	109/107R	1030/975	2271/2149	450	65	9.7	221	683
15	70"	225/70R15C	-	BSW	6.5	8	112/110R	1120/1060	2469/2337	450	65	9.7	228	697
16	70"	225/70R15C	-	BSW	6.5	10	116/114Q	1250/1180	2756/2601	550	80	9.7	228	697
17	75"	185/75R16C	-	BSW	5.0	8	104/102R	900/850	1984/1874	475	69	9.7	184	684
18	75"	195/75R16C	-	BSW	5.5	8	107/105R	975/925	2149/2039	475	69	9.7	196	698
19	75"	205/75R16C	-	BSW	5.5	8	110/108R	1060/1000	2337/2205	475	69	9.7	203	714
20	75"	215/75R16C	-	BSW	6.0	8	113/111R	1150/1090	2535/2403	475	69	9.7	216	728
21	80"	155R12C	-	BSW	4.5	8	88/86Q	560/530	1235/1168	450	65	9.7	157	550
22	80"	155R13C	-	BSW	4.5	6	85/83Q	515/487	1135/1074	350	50	9.7	157	578
23	80"	165R13C	-	BSW	4.5	6	91/89Q	615/580	1356/1279	350	50	9.7	167	596
24	80"	185R14C	-	BSW	5.5	8	102/100Q	850/800	1874/1764	450	65	9.7	188	650
25	80"	195R14C	-	BSW	5.5	8	106/104Q	950/900	2094/1984	450	65	9.7	198	666
26	80"	195R15C	-	BSW	5.5	8	106/104Q	950/900	2094/1984	450	65	9.7	196	693
27	80"	205R14C	-	BSW	6.0	8	109/107Q	1030/975	2271/2149	450	65	9.7	208	686
28	80"	205R16C	-	WSW	6.0	8	110/108R	1060/1000	2337/2205	450	65	9.7	208	736

VAN

TRAVIA VAN2

▶ Long Mileage Solution

- High abrasion tread compound to enhance expected mileage markedly.

▶ All-weather Grip Solution

- Three straight mian pattern grooves to enhance outstanding wet grip.

▶ High Load Solution

- Reinforced tyre body and band structure to provide tronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max.Air Pressure (KPa)	Max.Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	65"	185/65R15LT	-	BSW	5.5	12	103/100S	875/800	1929/1764	650	-	7.4	189	621
2	75"	205/75R14C	-	WSW	5.5	8	109/107R	1030/975	2271/2149	475	69	9.8	203	664
3	80"	185R14C	-	WSW	5.5	8	102/100Q	850/800	1874/1764	450	65	9.8	188	650
4	80"	185R15C	-	WSW	5.5	8	103/102Q	875/850	1929/1874	450	65	9.8	188	674
5	80"	195R14C	-	WSW	5.5	8	106/104Q	950/900	2094/1984	450	65	9.8	198	666
6	80"	195R15C	-	WSW	5.5	8	106/104Q	950/900	2094/1984	450	65	9.8	196	693

LT

LUCKYSTAR

▶ Long Mileage Solution

- High abrasion tread compound combined with deepened treaddepth to enhance expected mileage markedly.

▶ Low Failure Solution

- Specially designed bead curve can effectively protect againstoverwear and avoid early damage.

▶ High Load Solution

- Reinforced cord fabric and high tenacity steel cord to providestronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max.Air Pressure (KPa)	Max.Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	70"	215/70R17.5	-	BSW	6.0	10	118/116L	1320/1250	2910/2755	590	85	12	211	747

LT

LUCKYSTAR L2

▶ Long Mileage Solution

- High abrasion tread compound combined with widened tread width to enhance expected mileage markedly.

▶ Low Failure Solution

- Enhanced chafer to avoid early damage.

▶ High Load Solution

- Reinforced tyre body and band structure to provide stronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max.Air Pressure (KPa)	Max.Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	70"	215/70R17.5	-	BSW	6.0	10	118/116L	1320/1250	2910/2755	590	85	11.5	211	747
2	95"	7.00R16LT	-	BSW	5.5	12	115/110N	1215/1060	2679/2337	670	97	11.5	200	775
3	95"	7.50R16LT	-	BSW	6.0	14	122/118N	1500/1320	3307/2910	770	112	11.5	215	805

LT

LUCKYSTAR L3

▶ Long Mileage Solution

- High abrasion tread compound combined with widened tread width to enhance expected mileage markedly.

▶ Low Failure Solution

- Enhanced chafer to avoid early damage.

▶ High Load Solution

- Reinforced tyre body and band structure to provide stronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	100"	6.50R16LT	-	BSW	5.5	10	107/102N	975/850	2149/1874	560	81	11.5	185	750

WINTER SERIES



► Transport Efficiency Solution

- Specific directed pattern to improve driving stability effectively, providing the drivers a better sense of driving.



► All-weather Grip Solution

- Wide mian pattern grooves to enhance outstanding wet grip.

► All-season Grip Solution

- Professional snow compound combined with steel disc to ensure safe driving on inclement freezing conditions.

NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	35"	235/35R19	XL	BSW	8.5	-	91V	615	1356	340	50	8.8	241	647
2	40"	225/40R18	XL	BSW	8.0	-	92V	630	1389	340	50	8.8	230	637
3	45"	225/45R17	XL	BSW	7.5	-	94H	670	1477	340	50	8.8	225	634
4	45"	225/45R17	XL	BSW	7.5	-	94V	670	1477	340	50	8.8	225	634
5	45"	225/45R18	XL	BSW	7.5	-	95V	690	1521	340	50	8.8	225	659
6	45"	235/45R17	XL	BSW	8.0	-	97V	730	1609	340	50	8.8	236	644
7	45"	245/45R18	XL	BSW	8.0	-	100V	800	1764	340	50	8.8	243	677
8	50"	205/50R17	XL	BSW	6.5	-	93V	650	1433	340	50	8.8	214	638
9	50"	225/50R17	XL	BSW	7.0	-	98H	750	1653	340	50	8.8	233	658
10	50"	225/50R17	XL	BSW	7.0	-	98V	750	1653	340	50	8.8	233	658
11	55"	185/55R15	SL	BSW	6.0	-	82H	475	1047	350	51	8.4	194	585
12	55"	195/55R15	SL	BSW	6.0	-	85H	515	1135	350	51	8.8	201	595
13	55"	195/55R16	SL	BSW	6.0	-	87H	545	1201	350	51	8.8	201	620
14	55"	195/55R16	XL	BSW	6.0	-	91H	615	1356	340	50	8.8	201	620
15	55"	205/55R16	SL	BSW	6.5	-	91H	615	1356	350	51	8.8	214	632
16	55"	205/55R16	SL	BSW	6.5	-	91V	615	1356	350	51	8.8	214	632
17	55"	205/55R16	XL	BSW	6.5	-	94V	670	1477	340	50	8.8	214	632
18	55"	215/55R16	XL	BSW	7.0	-	97H	730	1609	340	50	8.8	226	642
19	55"	215/55R16	XL	BSW	7.0	-	97V	730	1609	340	50	8.8	226	642
20	55"	215/55R17	XL	BSW	7.0	-	98V	750	1653	340	50	8.8	226	668
21	55"	225/55R16	XL	BSW	7.0	-	99H	775	1709	340	50	8.8	233	654
22	55"	225/55R17	SL	BSW	7.0	-	97H	730	1609	350	51	8.8	233	680
23	55"	225/55R17	XL	BSW	7.0	-	101V	825	1819	340	50	8.8	233	680
24	60"	185/60R14	SL	BSW	5.5	-	82T	475	1047	350	51	8.4	189	578
25	60"	185/60R14	SL	BSW	5.5	-	82H	475	1047	350	51	8.4	189	578
26	60"	185/60R15	SL	BSW	5.5	-	84H	500	1102	350	51	8.4	189	603
27	60"	185/60R15	XL	BSW	5.5	-	88T	560	1235	340	50	8.4	189	603
28	60"	195/60R15	SL	BSW	6.0	-	88H	560	1235	350	51	8.8	201	615
29	60"	205/60R16	SL	BSW	6.0	-	92H	630	1389	350	51	8.8	209	652
30	60"	215/60R16	SL	BSW	6.5	-	95H	690	1521	350	51	8.8	221	664
31	60"	215/60R16	XL	BSW	6.5	-	99V	775	1709	340	50	8.8	221	664
32	60"	215/60R16	XL	BSW	6.5	-	99H	775	1709	340	50	8.8	221	664
33	60"	215/60R16	SL	BSW	6.5	-	95V	690	1521	350	51	8.8	221	664
34	65"	155/65R14	SL	BSW	4.5	-	75T	387	853	350	51	8.4	157	558
35	65"	165/65R14	SL	BSW	5.0	-	79T	437	963	350	51	8.4	170	570
36	65"	175/65R14	SL	BSW	5.0	-	82T	475	1047	350	51	8.4	177	584
37	65"	185/65R14	SL	BSW	5.5	-	86T	530	1168	350	51	8.4	189	596
38	65"	185/65R14	SL	BSW	5.5	-	86H	530	1168	350	51	8.4	189	596
39	65"	185/65R15	SL	BSW	5.5	-	88H	560	1235	350	51	8.4	189	621
40	65"	185/65R15	SL	BSW	5.5	-	88T	560	1235	350	51	8.4	189	621
41	65"	195/65R15	SL	BSW	6.0	-	91T	615	1356	350	51	8.8	201	635
42	65"	195/65R15	SL	BSW	6.0	-	91H	615	1356	350	51	8.8	201	635
43	65"	205/65R15	SL	BSW	6.0	-	94H	670	1477	350	51	8.8	209	647
44	65"	205/65R16C	-	BSW	6.0	8	107/105R	975/925	2149/2039	475	69	8.8	209	672
45	65"	215/65R16	SL	BSW	6.5	-	98H	750	1653	350	51	8.8	221	686
46	65"	235/65R16C	-	BSW	7.0	8	115/113R	1215/1150	2679/2535	475	69	8.8	240	712
47	70"	155/70R13	SL	BSW	4.5	-	75T	387	853	350	51	8.4	157	548
48	70"	165/70R13	SL	BSW	5.0	-	79T	437	963	350	51	8.4	170	562
49	70"	165/70R14	SL	BSW	5.0	-	81T	462	1019	350	51	8.4	170	588
50	70"	175/70R13	SL	BSW	5.0	-	82T	475	1047	350	51	8.4	177	576
51	70"	175/70R14	SL	BSW	5.0	-	84T	500	1102	350	51	8.4	177	602
52	75"	215/75R16C	-	BSW	6.0	8	113/111R	1150/1090	2535/2403	475	69	8.8	216	728
53	75"	225/75R16C	-	BSW	6.0	10	121/120R	1450/1400	3197/3086	575	83	8.8	223	744
54	80"	155/80R13	SL	BSW	4.5	-	79T	437	963	350	51	8.4	157	578

WINTER

MOZZO WINTER ICE

► Transport Efficiency Solution

- Specific directed pattern to improve driving stability effectively, providing the drivers a better sense of driving.

► All-weather Grip Solution

- Wide mian pattern grooves to enhance outstanding wet grip.

► All-season Grip Solution

- Professional snow compound combined with steel disc to ensure safe driving on inclement freezing conditions.



WINTER

MOZZO WINTER VAN

► Transport Efficiency Solution

- Specific directed pattern to improve driving stability effectively, providing the drivers a better sense of driving.

► All-weather Grip Solution

- Wide mian pattern grooves to enhance outstanding wet grip.

► All-season Grip Solution

- Professional snow compound combined with steel disc to ensure safe driving on inclement freezing conditions.

► High Load Solution

- Reinforced tyre body structure to provide stronger load capacity.



NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	55"	205/55R16	SL	BSW	6.5	-	91T	615	1356	350	51	10	214	632
2	60"	185/60R14	SL	BSW	5.5	-	82T	475	1047	350	51	10	189	578
3	60"	195/60R14	SL	BSW	6.0	-	86T	530	1168	350	51	10	201	590
4	60"	225/60R16	SL	BSW	6.5	-	98T	750	1653	350	51	10	228	676
5	65"	175/65R14	SL	BSW	5.0	-	82T	475	1047	350	51	10	177	584
6	65"	185/65R14	SL	BSW	5.5	-	86T	530	1168	350	51	10	189	596
7	65"	185/65R15	SL	BSW	5.5	-	88T	560	1235	350	51	10	189	621
8	65"	195/65R15	SL	BSW	6.0	-	91T	615	1356	350	51	10	201	635
9	65"	235/65R17	XL	BSW	7.0	-	108t	1000	2205	340	50	10	240	738
10	70"	165/70R13	SL	BSW	5.0	-	79T	437	963	350	51	10	170	562
11	70"	175/70R13	SL	BSW	5.0	-	82T	475	1047	350	51	10	177	576
12	70"	205/70R14	XL	BSW	6.0	-	98T	750	1653	340	50	10	209	644
13	70"	235/70R16	SL	BSW	7.0	-	106T	950	2094	350	51	10	240	736
14	70"	205/70R15C	-	BSW	6.0	8	106/104R	950/900	2094/1984	450	65	10	209	669
15	75"	185/75R16C	-	BSW	5.0	8	104/102R	900/850	1984/1874	475	69	10	184	684
16	75"	235/75R15	SL	BSW	6.5	-	105T	925	2039	350	51	10	235	733

NO.	Series	Size	SL/XL	Sidewall Type	Rim	PR	LI/SS	Max. Load Capacity (KG)	Max. Load Capacity (LBS)	Max. Air Pressure (KPa)	Max. Air Pressure (PSI)	Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
1	60"	195/60R16C	-	BSW	6.0	6	99/97T	775/730	1709/1609	375	54	8	201	640
2	65"	205/65R16C	-	BSW	6.0	8	107/105R	975/925	2149/2039	475	69	8	209	672
3	65"	215/65R16C	-	BSW	6.5	8	109/107R	1030/975	2271/2149	475	69	8	221	686
4	65"	225/65R16C	-	BSW	6.5	8	112/110R	1120/1060	2469/2337	475	69	8	228	698
5	65"	235/65R16C	-	BSW	7.0	8	115/113R	1215/1150	2679/2535	475	69	8	240	712
6	70"	195/70R15C	-	BSW	6.0	8	104/102R	900/850	1984/1874	450	65	8	201	655
7	70"	215/70R15C	-	BSW	6.5	8	109/107R	1030/975	2271/2149	450	65	8	221	683
8	70"	225/70R15C	-	BSW	6.5	8	112/110R	1120/1060	2469/2337	450	65	8	228	697
9	75"	195/75R16C	-	BSW	5.5	8	107/105R	975/925	2149/2039	475	69	8	196	698
10	75"	205/75R16C	-	BSW	5.5	8	110/108R	1060/1000	2337/2205	475	69	8	203	714
11	75"	215/75R16C	-	BSW	6.0	8	113/111R	1150/1090	2535/2403	475	69	8	216	728

