



info@widewaytire.com

www.widewaytire.com

Authorized Distributor:



PCR TIRES



**BRIEF
 INTRODUCTI**

Wide way is a new premium tire brand for which exclusive distribution opportunities are still available for many countries.

We mainly specialized in designing and supplying all kinds of Radial tires, including Passenger Car Tires, SUV Tires, Light Truck Tires, Truck and Bus Tires etc.

Enjoying high popularity in both domestic and international markets, all the tires are produced under the first class equipments and strict quality management system to ensure the stable quality.

With high quality, reasonable price and excellent service, we are able to be one of your best tires suppliers and long term of business partners.



SAFeway

- Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance. Sharp-edged non-smooth groove guarantee protection against aquaplaning and also increasing steering performance.
- Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.
- Continuous solid center ribs and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.
- Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.



SAFeway



SIZES DESCRIPTION	SIDewALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OD.DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
145/70R12	69T BSW	4.5J	300/44	509	150	6.7
155/70R12	73T BSW	4.5J	300/44	523	157	6.7
155/65R13	73T BSW	4.5J	300/44	532	157	6.7
155/70R13	75T BSW	4.5J	300/44	548	157	6.7
155/80R13	79T BSW	4.5J	300/44	578	157	6.7
165/65R13	77T BSW	5.0J	300/44	544	170	6.7
165/70R13	79T BSW	5.0J	300/44	562	170	6.7
165/80R13	83T BSW	4.5J	300/44	594	165	6.7
175/60R13	77H BSW	5.0J	300/44	540	177	6.7
175/70R13	82T BSW	5.0J	300/44	576	177	6.7
185/70R13	86T BSW	5.5J	300/44	590	189	6.7
155/65R14	75H BSW	4.5J	300/44	558	157	6.7
165/60R14	75H BSW	5.0J	300/44	554	170	6.7
165/65R14	79H BSW	5.0J	300/44	570	170	6.7
165/70R14	81H BSW	5.0J	300/44	588	170	6.7
175/65R14	82H BSW	5.0J	300/44	594	177	6.7
175/70R14	84H BSW	5.0J	300/44	602	177	6.7
185/60R14	82H BSW	5.5J	300/44	578	189	6.7
185/65R14	86H BSW	5.5J	300/44	596	189	6.7
185/70R14	88H BSW	5.5J	300/44	616	189	6.7
195/60R14	86H BSW	6.0J	300/44	590	201	7.0
195/70R14	91H BSW	6.0J	300/44	630	201	7.0
205/60R14	88H BSW	6.0J	300/44	602	209	7.3
205/70R14	95H BSW	6.0J	300/44	644	209	7.0
175/55R15	77H BSW	5.5J	300/44	573	182	6.7
175/60R15	81H BSW	5.0J	300/44	591	177	6.7
175/65R15	84H BSW	5.0J	300/44	609	177	6.7
185/55R15	82V BSW	6.0J	300/44	585	194	7.0
185/60R15	84H BSW	5.5J	300/44	603	189	6.7
185/65R15	88H BSW	5.5J	300/44	621	189	6.7
195/60R15	88H BSW	6.0J	300/44	615	201	7.0
195/65R15	91V BSW	6.0J	300/44	635	201	7.0
205/60R15	91V BSW	6.0J	300/44	627	209	7.3
205/65R15	94H BSW	6.0J	300/44	647	209	7.3
205/70R15	96H BSW	6.0J	300/44	669	209	7.0
215/65R15	96H BSW	6.5J	300/44	661	221	7.3
215/70R15	98H BSW	6.5J	300/44	683	221	7.0
185/55R16	83V BSW	6.0J	300/44	610	194	7.0
195/60R16	89H BSW	6.0J	300/44	640	201	7.0
205/55R16	91V BSW	6.5J	300/44	678	214	7.3
205/60R16	92V BSW	6.0J	300/44	652	209	7.3
205/65R16	95H BSW	6.0J	300/44	672	209	7.3
215/60R16	95V BSW	6.5J	300/44	664	221	7.3
215/65R16	98H BSW	6.5J	300/44	686	221	7.3
225/60R16	98H BSW	6.5J	300/44	676	228	7.3
225/65R16	100H BSW	6.5J	300/44	698	228	7.3
235/60R16	100H BSW	7.0J	300/44	688	240	7.3



SPORTSWAY

- Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.
- Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.
- Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.
- Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



SPORTSWAY				D-C	D-C-E	E	
SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OAD DIAMETER (mm)	SECTION WIDTH	TREAD DEPTH (mm)	
195/50R15	82V	BSW	6J	300/44	577	201	7.8
195/55R15	85V	BSW	6J	300/44	595	201	7.8
195/45R16	84VXL	BSW	6 1/2J	340/50	582	195	7.0
195/55R16	91VXL	BSW	6J	340/50	620	201	7.8
205/45ZR16	87WXL	BSW	7J	340/50	590	206	7.0
205/50ZR16	91WXL	BSW	6 1/2J	340/50	612	214	7.8
205/55ZR16	94WXL	BSW	6 1/2J	340/50	632	214	7.8
215/55ZR16	97WXL	BSW	7J	340/50	642	226	7.8
225/55ZR16	99WXL	BSW	7J	340/50	654	223	7.8
205/40Zr17	84WXL	BSW	7 1/2J	340/50	596	212	7.8
205/45Zr17	88WXL	BSW	7J	340/50	616	206	7.0
205/50Zr17	93WXL	BSW	6 1/2J	340/50	638	214	7.8
215/45Zr17	91WXL	BSW	7J	340/50	626	213	7.8
215/50Zr17	95WXL	BSW	7J	340/50	648	226	7.8
215/55Zr17	98WXL	BSW	7 1/2J	340/50	668	226	7.8
225/45Zr17	94WXL	BSW	7 1/2J	340/50	634	225	7.8
225/50Zr17	98WXL	BSW	7J	340/50	658	233	7.8
225/55R17	101WXL	BSW	7J	340/50	680	223	7.8
235/45Zr17	97WXL	BSW	8J	340/50	644	236	7.8
235/50Zr17	100WXL	BSW	7 1/2J	340/50	668	245	7.0
235/55Zr17	103WXL	BSW	7 1/2J	340/50	690	245	7.0
245/45Zr17	99WXL	BSW	8J	340/50	652	243	7.0
215/35Zr18	84WXL	BSW	7 1/2J	340/50	607	218	7.8
225/40Zr18	92WXL	BSW	8J	340/50	637	230	7.8
225/45Zr18	95WXL	BSW	7 1/2J	340/50	659	225	7.8
235/40Zr18	95WXL	BSW	8 1/2J	340/50	645	241	7.8
235/45Zr18	98WXL	BSW	8J	340/50	669	236	7.0
235/50Zr18	101WXL	BSW	7 1/2J	340/50	693	245	7.0
245/40Zr18	97WXL	BSW	8 1/2J	340/50	653	248	7.0
245/45Zr18	100WXL	BSW	8J	340/50	677	243	7.0
255/35Zr18	94WXL	BSW	9J	340/50	635	260	7.0
255/40Zr18	99WXL	BSW	9J	340/50	661	260	7.0
225/35Zr19	88WXL	BSW	8J	340/50	641	230	7.0
235/35Zr19	91WXL	BSW	8 1/2J	340/50	647	241	7.0
245/35Zr19	93WXL	BSW	8 1/2J	340/50	655	248	7.8
245/40Zr19	98WXL	BSW	8 1/2J	340/50	679	248	7.0
245/45Zr19	102WXL	BSW	8J	340/50	703	243	7.0
255/35Zr19	96WXL	BSW	9J	340/50	661	260	7.0
225/35Zr20	93WXL	BSW	8J	340/50	666	230	7.8
245/30Zr20	97WXL	BSW	8 1/2J	340/50	656	248	7.0
245/35Zr20	95WXL	BSW	8 1/2J	340/50	680	248	7.0
245/45Zr20	103WXL	BSW	8J	340/50	728	243	7.0
255/35Zr20	102W	BSW	9J	340/50	686	260	7.0
255/45Zr20	105WXL	BSW	8 1/2J	340/50	738	255	7.0
245/30Zr22	92WXL	BSW	8 1/2J	340/50	647	248	7.0
255/30Zr22	95WXL	BSW	9J	340/50	713	260	7.0
255/30Zr24	97WXL	BSW	9J	340/50	764	260	7.0
275/25Zr24	96WXL	BSW	10J	340/50	748	283	7.8
235/65R17	108HXL	BSW	7J	340/50	738	240	8.3
245/65R17	107H	BSW	7J	300/44	750	248	8.3
255/60R17	110H	BSW	7 1/2J	340/50	738	260	7.8
255/65R17	110H	BSW	7 1/2J	300/44	764	260	8.3
265/65R17	112H	BSW	8J	300/44	776	272	8.3
255/55R18	109VXL	BSW	8J	340/50	737	265	8.3
255/60R18	112VXL	BSW	7 1/2J	340/50	763	260	7.8
255/50R19	107VXL	BSW	8J	340/50	739	265	7.8
255/55R19	111VXL	BSW	8J	340/50	763	265	7.8
265/50R20	111VXL	BSW	8 1/2J	340/50	774	277	7.8
275/40R20	106VXL	BSW	9 1/2J	340/50	728	278	7.8
275/45R20	110VXL	BSW	9J	340/50	756	273	7.8
275/55R20	117VXL	BSW	8 1/2J	340/50	810	284	7.8
275/60R20	119VXL	BSW	8J	340/50	838	279	7.8
285/50R20	116VXL	BSW	9J	340/50	794	297	7.8
295/35Zr21	107WXL	BSW	10 1/2J	340/50	739	301	7.8
295/40Zr21	111WXL	BSW	10 1/2J	340/50	769	301	7.8
265/35R22	102VXL	BSW	9 1/2J	340/50	745	271	7.8
285/35R22	106VXL	BSW	10J	340/50	759	290	7.8
305/40R22	114VXL	BSW	11J	340/50	803	313	7.8
305/45R22	118VXL	BSW	10J	340/50	833	303	7.8
295/35R24	110VXL	BSW	10 1/2J	340/50	816	301	7.8
305/35R24	112VXL	BSW	11J	340/50	824	313	7.8



SPEEDWAY



- Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. In-profile grooves and bead profile design offer better ride stability, endurance and handling performance.
- The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.
- Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.
- High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX. PRESSURE	O.A. DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
235/70R16	106H	BSW	7J	300/44	736	240	8.3
245/70R16	111HXL	BSW	7J	300/50	750	248	8.3
255/65R16	109H	BSW	7 1/2J	300/44	738	260	8.3
255/70R16	111H	BSW	7 1/2J	300/44	764	260	8.3
265/70R16	112H	BSW	8J	300/44	778	272	8.3
275/70R16	114H	BSW	8J	300/44	792	279	8.3
215/60R17	96H	BSW	6 1/2J	300/44	690	221	8.3
215/65R17	99H	BSW	6 1/2J	300/44	712	221	8.3
225/60R17	99H	BSW	6 1/2J	300/44	702	228	8.3
225/65R17	102H	BSW	6 1/2J	300/44	724	228	8.3
235/60R17	106HXL	BSW	7J	300/50	714	240	8.3
235/65R17	104H	BSW	7J	300/44	738	240	8.3
245/65R17	111HXL	BSW	7J	300/50	750	248	8.3
255/65R17	110H	BSW	7 1/2J	300/44	764	260	8.3
265/65R17	112H	BSW	8J	300/44	776	272	8.3
265/70R17	115H	BSW	8J	300/44	804	272	8.3
275/65R17	115H	BSW	8J	300/44	790	279	8.3
285/65R17	116H	BSW	8 1/2J	300/44	802	292	8.3
235/55R18	104HXL	BSW	7 1/2J	340/50	715	245	8.3
235/60R18	107HXL	BSW	7J	340/50	739	240	8.3
265/60R18	110H	BSW	8J	300/44	775	272	8.3
285/60R18	116H	BSW	8 1/2J	300/44	799	292	8.3



M+S

WEYONE AK3

- Comprehensive pattern design ensure enough traction, challenge any road conditions, ultra wear resistance and strong off-road performances.
- The open shoulder design provide good drainage performance and acceptable noise.
- Special shoulder design deliver additional traction and protect sidewall from external power.
- Superior sidewall design and optimal tread capability to ensure long wear in tough conditions.
- Sidewall design can protect rim effectively.



SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OA DIAMETER (mm)	SECTION WIDTH	TREAD DEPTH $\pm 0.3mm$	SPECIFICATIONS
LT215/75R15	100/97R	RWL 6J	350/51	704	220	11	M+S, 3PMFSF
LT235/75R15	104/101R	RWL 6J/2J	350/51	734	240	10.8	M+S, 3PMFSF
31x10.50R15LT	109R	RWL 81/2J	350/51	788	268	12	M+S, 3PMFSF
LT265/70R15	109/105Q	RWL 71/2J	350/51	752	268	11	M+S, 3PMFSF
LT215/65R16	109/105S	RWL 61/2J	300/44	686	221	11	M+S, 3PMFSF
LT215/70R16	100/97R	RWL 61/2J	350/51	708	221	11	M+S, 3PMFSF
LT235/70R16	104/101R	RWL 7J	350/51	736	240	11	M+S, 3PMFSF
LT245/70R16	113/110R	RWL 7J	450/65	750	248	11	M+S, 3PMFSF
LT245/75R16	120/116R	RWL 7J	550/80	774	248	11	M+S, 3PMFSF
LT265/70R16	121/118R	RWL 8J	550/80	778	272	11.5	M+S, 3PMFSF
LT265/75R16	121/118R	RWL 81/2J	550/80	804	267	11	M+S, 3PMFSF
LT285/75R16	121/118R	RWL 8J	550/80	834	286	11	M+S, 3PMFSF
LT225/70R16	102/99S	RWL 61/2J	550/80	721	230	11	M+S, 3PMFSF
LT255/70R16	120/117S	RWL 8J	550/80	763	258	11	M+S, 3PMFSF
LT275/70R16	119/116Q	RWL 8J	450/65	436	279	11	M+S, 3PMFSF
LT285/70R16	121/118Q	RWL 81/2J	550/80	805	290	11	M+S, 3PMFSF
LT225/65R17	107/103R	RWL 61/2J	450/65	724	228	11.5	M+S, 3PMFSF
LT245/65R17	111/108R	RWL 7J	450/65	750	248	11	M+S, 3PMFSF
LT265/65R17	120/117R	RWL 8J	550/80	776	272	11	M+S, 3PMFSF
LT265/70R17	121/118R	RWL 8J	550/80	804	272	11	M+S, 3PMFSF
LT285/70R17	121/118Q	RWL 8J	550/80	832	292	11	M+S, 3PMFSF
LT315/70R17	113/110R	RWL 10J	350/44	877	318	11	M+S, 3PMFSF
LT345/70R17	119/116R	RWL 7J	550/80	776	248	11	M+S, 3PMFSF
LT245/75R17	121/118R	RWL 7J	550/80	780	248	11	M+S, 3PMFSF
LT285/65R17	121/118S	RWL 81/2J	550/80	631	289	11	M+S, 3PMFSF
LT275/70R17	121/118S	RWL 8J	550/80	817	280	12	M+S, 3PMFSF
35X12.50R17	121Q	RWL 11J	450/65	889	318	11	M+S, 3PMFSF
LT235/65R17	109/105R	RWL 61/2J	450/65	737	240	11	M+S, 3PMFSF
LT275/65R17	121/118S	RWL 81/2J	550/80	789	280	11	M+S, 3PMFSF
LT255/75R17	111/108Q	RWL 7J	350/44	814	260	11	M+S, 3PMFSF
LT265/60R18	119/116R	RWL 8J	550/80	775	272	11	M+S, 3PMFSF
LT275/65R18	121/118R	RWL 8J	550/80	815	279	12	M+S, 3PMFSF
LT255/70R18	117/114S	RWL 71/2J	550/80	763	260	12	M+S, 3PMFSF
LT265/65R18	121/118R	RWL 8J	550/80	775	272	11	M+S, 3PMFSF
LT265/70R18	121/118R	RWL 8J	550/80	829	277	11	M+S, 3PMFSF
35x12.50R18LT	118R	RWL 10J	450/65	889	318	13	M+S, 3PMFSF
LT285/60R18	121/118R	RWL 81/2J	550/80	799	290	11	M+S, 3PMFSF
LT285/65R18	121/118Q	RWL 81/2J	550/80	828	288	11	M+S, 3PMFSF
LT225/60R18	106/103S	RWL 71/2J	450/65	727	230	11	M+S, 3PMFSF
LT235/60R18	108/104S	RWL 71/2J	450/65	739	240	11	M+S, 3PMFSF
LT235/65R18	110/107S	RWL 7J	450/65	763	240	11	M+S, 3PMFSF
LT275/70R18	121/118Q	RWL 8J	550/80	842	280	12	M+S, 3PMFSF
LT285/70R18	121/118Q	RWL 8J	550/80	856	290	11	M+S, 3PMFSF
LT255/75R18	112/109S	RWL 71/2J	350/44	840	260	11	M+S, 3PMFSF
LT245/55R19	110/107S	RWL 9J	450/65	752	250	11	M+S, 3PMFSF
LT255/55R19	111/108S	RWL 9J	450/65	763	260	11	M+S, 3PMFSF
LT235/55R19	106/100S	RWL 9J	450/65	741	240	12	M+S, 3PMFSF
LT265/50R20	116/113R	RWL 81/2J	550/80	774	277	11	M+S, 3PMFSF
LT275/55R20	115/112R	RWL 81/2J	450/65	810	284	11	M+S, 3PMFSF
LT265/60R20	121/118S	RWL 81/2J	450/65	774	277	11	M+S, 3PMFSF
LT275/60R20	119/116S	RWL 81/2J	550/80	748	284	11	M+S, 3PMFSF
LT285/50R20	119/116R	RWL 9J	550/80	794	297	11	M+S, 3PMFSF
LT285/60R20	125/122S	RWL 9J	550/80	828	297	12	M+S, 3PMFSF
33X12.50R20	114Q	RWL 11J	450/65	838	298	12.5	M+S, 3PMFSF
LT265/55R20	119/115S	RWL 81/2J	550/80	800	267	11	M+S, 3PMFSF
LT285/55R20	121/118S	RWL 9J	550/80	822	290	12	M+S, 3PMFSF
LT305/55R20	121/118S	RWL 11J	550/80	844	308	13	M+S, 3PMFSF
LT275/50R21	118/115S	RWL 11J	550/80	808	280	13	M+S, 3PMFSF
LT285/45R22	116/113S	RWL 10J	550/80	815	288	13	M+S, 3PMFSF



- Comprehensive pattern design ensure enough traction, challenge any road conditions, ultra wear resistance and strong off-road performances.
- The open shoulder design provide good drainage performance and acceptable noise.
- Special shoulder design deliver additional traction and protect sidewall from external power.
- Superior sidewall design and optimal tread capability to ensure long wear in tough conditions.
- Sidewall design can protect rim effectively.

M+S

BAJA KING A/T

SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	SPECIFICATION	
LT265/70R16	121/118R	RWL	8.0J	550/80	787	272	11	M+S, 3PMSF
LT265/75R16	123/120R	RWL	7.5J	550/80	813	277	11	M+S, 3PMSF
LT285/75R16	126/123R	RWL	8.0J	550/80	836	302	11	M+S, 3PMSF
LT265/65R17	120/117R	RWL	8.0J	550/80	775	277	11	M+S, 3PMSF
LT265/70R17	121/118R	RWL	8.0J	550/80	810	277	11	M+S, 3PMSF
LT285/70R17	121/118R	RWL	8.5J	550/80	838	297	11	M+S, 3PMSF
LT265/60R18	119/116R	RWL	8.0J	550/80	782	277	11	M+S, 3PMSF
LT275/70R17	121/118R	RWL	8J	550/80	763	258	11	M+S, 3PMSF
LT315/70R17	113/110R	RWL	10J	350/44	877	318	11	M+S, 3PMSF
LT265/65R18	121/118R	RWL	8 J	550/80	789	280	11	M+S, 3PMSF
LT275/65R18	121/118R	RWL	8J	550/80	815	279	11	M+S, 3PMSF
LT285/65R18	121/118R	RWL	8 1/2J	550/80	799	290	11	M+S, 3PMSF
LT265/70R18	121/118R	RWL	8J	550/80	856	290	11	M+S, 3PMSF
LT275/70R18	121/118R	RWL	8J	550/80	856	290	11	M+S, 3PMSF
LT285/70R18	121/118R	RWL	8J	550/80	856	290	11	M+S, 3PMSF
LT275/55R20	115/112R	RWL	8 1/2J	550/80	774	277	11	M+S, 3PMSF
LT285/55R20	121/118R	RWL	9J	550/80	828	297	11	M+S, 3PMSF




M+S 

MUD-TERRAIN MT6



- It's a popular choice for backcountry, gravel, or mountain roads with loose, unsteady, or muddy surfaces.
- The aggressive tread design delivers confident grip on a variety of terrains, including mud, gravel, snow, dirt, rock and blacktop.
- Special compound for maximum tear resistance and tread life.
- Designed to increase sidewall traction, puncture resistance, and mud evacuation.
- Staggered self-cleaning tread blocks.

SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX PRESSURE	OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm	SPECIFICATION
LT245/75R16	120/116Q	BSW 7J	550/80	774	248	13.0	M+S, 3PMSF
LT265/70R16	121/118Q	RWL 8J	550/80	778	272	13.0	M+S, 3PMSF
LT265/75R16	123/120Q	RWL 7.5J	550/80	804	267	13.0	M+S, 3PMSF
LT285/75R16	126/123Q	RWL 8J	550/80	834	286	13.0	M+S, 3PMSF
LT315/75R16	127/124Q	RWL 8 1/2J	450/65	878	313	13.0	M+S, 3PMSF
LT265/65R17	120/117Q	RWL 8J	550/80	776	272	13.0	M+S, 3PMSF
LT265/70R17	121/118Q	RWL 8J	550/80	804	272	13.0	M+S, 3PMSF
LT285/70R17	121/118Q	RWL 8 1/2J	550/80	832	292	13.0	M+S, 3PMSF
LT315/70R17	121/118Q	RWL 9 1/2J	450/65	875	323	13.0	M+S, 3PMSF
LT265/60R18	119/116Q	RWL 8J	550/80	775	272	13.0	M+S, 3PMSF
LT285/65R18	125/122Q	RWL 8 1/2J	550/80	827	292	13.0	M+S, 3PMSF
LT235/75R15	110/107Q	RWL 6 1/2J	450/65	733	235	13.0	M+S, 3PMSF
31×10.50R15LT	109Q	RWL 8 1/2J	350/51	775	268	13.0	M+S, 3PMSF
33×12.50R15LT	108Q	RWL 10J	250/35	826	318	13.0	M+S, 3PMSF
33×12.50R17LT	120Q	RWL 10J	450/65	826	318	13.0	M+S, 3PMSF
33×12.50R20LT	114Q	BSW 10J	450/65	826	318	13.0	M+S, 3PMSF

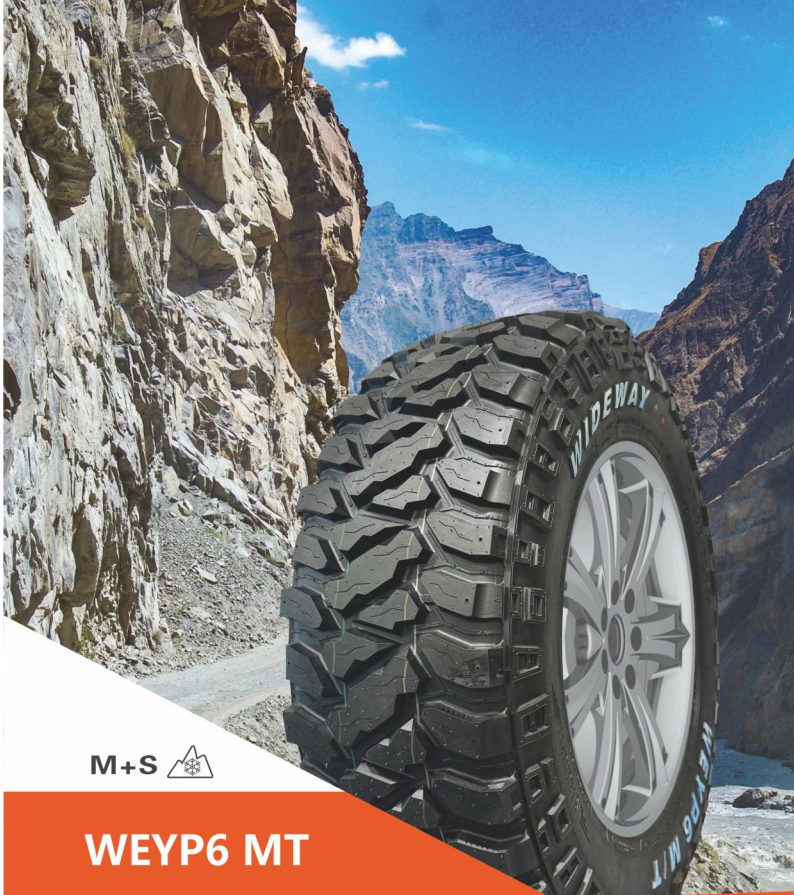

M+S

WEYP6 MT



- Silica-reinforced tread compound for enhanced wet performance, longevity and cut/chip resistance.
- Powerply 3-Ply sidewall construction for sidewall protection and responsive handling.
- Four-Pitch Sidebiter® pattern grips terrain for additional traction and provides sidewall protection.
- Self-cleaning high-void tread pattern and angled shoulder scallops provide additional off road traction.
- Variable draft angles and stone ejectors help to reduce stone retention.

SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	O.A.DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm	SPECIFICATION	
LT265/65R17	120/117Q	RWL+RP	8.0	550/80	800	272	14.0	M+S, 3PM5F
LT265/70R17	121/118Q	RWL+RP	8.0	550/80	810	272	14.0	M+S, 3PM5F
LT285/70R17	121/118Q	RWL+RP	8.5	550/80	838	292	14.0	M+S, 3PM5F
LT315/70R17	121/118Q	RWL+RP	9.5	550/80	879	320	14.5	M+S, 3PM5F
LT265/60R18	119/116Q	RWL+RP	8.0	550/80	848	285	14.0	M+S, 3PM5F
LT35X12.5R17	121Q	RWL+RP	10.0	450/65	889	318	14.5	M+S, 3PM5F
LT37X12.5R17	121Q	RWL+RP	10.0	450/65	935	330	14.5	M+S, 3PM5F
LT35X13.5R17	121Q	RWL+RP	11.0	450/65	910	315	14.5	M+S, 3PM5F
LT37X13.5R17	121Q	RWL+RP	11.0	450/65	940	335	14.5	M+S, 3PM5F
LT35X13.5R20	121Q	RWL+RP	11.0	450/65	882	335	14.5	M+S, 3PM5F
LT37X13.5R20	127Q	RWL+RP	11.0	450/65	937	338	14.5	M+S, 3PM5F



- Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.
- The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.
- The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.
- Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



POWERWAY A/T

SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
P235/75R15	1095XL	OWL	6 1/2J	340/50	733	235	8.7
P265/70R15	112T	OWL	8J	300/44	753	272	9.2
P215/70R16	100T	RBL	6 1/2J	300/44	708	221	8.2
P225/70R16	103T	OWL	6 1/2J	300/44	722	228	8.2
P235/70R16	106T	OWL	7J	300/44	736	240	8.8
P245/70R16	107T	OWL	7J	340/50	750	248	8.8
P255/70R16	111T	OWL	7 1/2J	300/44	764	260	9.2
P25/70R15C	109/107R	OWL	6 1/2J	450/65	683	221	8.2
P265/70R16	111T	OWL	8J	300/44	778	272	9.2
P275/70R16	114T	OWL	8J	300/44	792	279	9.2
P255/65R17	110T	OWL	7 1/2J	300/44	764	260	8.7
P265/65R17	112T	OWL	8J	300/44	776	272	8.7
P265/70R17	115T	OWL	8J	300/44	804	272	9
P275/65R17	115T	OWL	8J	300/44	790	279	9.2
LT235/75R15	104/101S	OWL	6 1/2J	350/50	733	235	11.2
31*10.50R15LT	109S	OWL	8 1/2J	350/51	775	268	11.7
215R15C	112/110S	RBL	6J	450/65	725	218	8.7
245/75R15C	109/107S	RBL	7J	375/55	749	248	11.2
LT215/85R16	115/112S	RBL	6J	550/80	772	216	10.9
LT235/85R16	120/116S	RBL	6 1/2J	550/80	806	235	11.7
LT225/75R16	115/112S	RBL	6J	550/80	744	223	10.9
LT245/75R16	120/116S	OWL	7J	550/80	774	248	11.3
LT265/75R16	123/120S	OWL	7 1/2J	550/80	804	267	11.7
LT285/75R16	122/119S	OWL	8J	450/65	834	286	11.6
185/75R16C	104/102S	RBL	5J	450/65	684	184	8.1
205R16C	110/108S	RBL	6J	450/65	736	208	8.2
LT245/75R17	121/118S	OWL	7J	550/80	800	248	9.7
LT265/70R17	121/118S	OWL	8J	550/80	804	272	11.7
P205/75R15	97T	OWL	6J	300/44	687	209	8.20
P215/75R15	100T	OWL	6J	300/44	703	216	8.20
P225/75R15	102T	OWL	6J	300/44	719	223	8.20



POWERWAY R/T



- STAGGERED SHOULDER LUGS: Provides traction in off-road environments.
- Slingstone structure: Protect the bottom of groove from sharp stone.
- STEP BLOCK EDGE: Step block edge provide additional biting edges for more traction
- Shoulder and block design: Shoulder grooves are arranged in alternating widths and lengths to clear mud and maintain traction. Irregular block provide more traction on different road condition.

POWERWAY R/T



SIZES DESCRIPTION	PR	LOADING INDEX	SPEED RATING	TREAD DEPTH (mm)	RELATABLE SECTION WIDTH (mm)	STRANDAR RIM	OVERALL DIAMETER (mm)	MAX LOAD KG	MAX LOAD LBS	MAX PRESSURE KPA	MAX PRESSURE PSI	SIDEWALL DESCRIPTION
31x10.50R15LT	10PR	109	Q	18	106	8.5	30.5	1030	2270	345	50	OWL
LT265/75R16	10PR	123/120	Q	18	10.5	7.5	31.9	1549	3415	552	80	OWL
LT285/75R16	10PR	126/123	R	18	11.5	8.0	33.1	1701	3750	552	80	OWL
LT305/70R16	10PR	124/121	Q	18	12.2	9.0	32.8	1599	3525	448	65	OWL
33x12.50R17LT	10PR	114	Q	18.5	12.5	10.0	32.8	1179	2600	345	50	OWL
LT265/70R17	10PR	121/118	Q	18	10.9	8.0	31.9	1449	3195	552	80	OWL
LT285/70R17	10PR	121/118	Q	18	12	8.5	33	1449	3195	552	80	OWL
LT315/70R17	10PR	121/118	R	16	13	9.5	34.6	1449	3195	345	50	OWL
33x12.50R18LT	10PR	118	R	16	12.8	10.0	32.8	1320	2910	448	65	OWL
LT265/60R18	10PR	120/117	S	16	10.7	8.0	31.5	1361	3000	552	80	OWL
LT265/50R20	10PR	121	S	18	10.4	8.5	30.4	1399	3085	552	80	OWL
LT275/55R20	10PR	120/117	R	18	11.4	8.5	32.1	1399	3085	552	80	OWL



POWERWAY M/T



- Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.
- High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.
- The block tread design with multiple-sipes provide outstanding offroad traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.
- Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX PRESSURE	OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (3mm)
31*10.50R15LT	109Q	RBL 8 1/2J	350/51	775	268	13.20
33*12.50R15LT	108Q	RBL 10J	250/35	826	318	13.20
35*12.50R15LT	113Q	RBL 10J	250/35	877	318	13.20
LT235/85R16	120/116Q	RBL 6 1/2J	550/80	806	235	13.20
LT245/75R16	120/116Q	RBL 7J	550/80	774	248	13.20
LT265/75R16	123/120Q	RBL 7 1/2J	550/80	804	267	13.20
LT285/75R16	126/123Q	RBL 8J	550/80	834	286	13.20
LT265/70R17	121/118Q	RBL 8J	550/80	804	272	13.20
LT285/70R17	121/118Q	RBL 8 1/2J	550/80	832	292	13.20
35*12.50R17LT	121Q	BSW 10J	450/65	877	318	13.20
LT305/70R16	124/121Q	BSW 8 1/2J	450/65	834	305	13.20
LT315/75R16	127/134Q	BSW 8 1/2J	450/65	884	315	13.20
LT33*12.50R17	120Q	BSW 10J	450/65	832	318	13.20
33*12.50R18LT	118Q	BSW 10J	450/65	832	318	13.20
35*12.50R18LT	123Q	BSW 10J	450/65	883	318	13.20
LT33X12.50R20	114Q	BSW 10J	450/65	826	318	14.20
LT35X12.50R20	121Q	BSW 10J	450/65	877	318	14.20
35X12.50R22LT	117Q	BSW 10J	450/65	877	318	14.20
LT37*12.50R22	123Q	BSW 10J	450/65	928	318	14.20



- Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.
- Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.
- Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.
- Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

ENERGYWAY I

SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	ØA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
155R12C	88/86Q	BSW	4.50B	450/65	550	157	7.8
155R13C	85/83Q	BSW	4.50B	350/50	578	157	7.8
165/70R13C	88/86S	BSW	5.00B	375/55	562	170	7.8
165R13C	91/89R	BSW	4.50B	375/55	596	167	7.8
165/70R14C	89/87R	BSW	5J	375/55	588	170	7.8
175/65R14C	90/88T	BSW	5J	375/55	584	177	8.2
185R14C	102/100R	BSW	5 1/2J	450/65	650	188	8.2
195R14C	106/104R	BSW	5 1/2J	450/65	666	198	8.2
195R15C	106/104R	BSW	5 1/2J	450/65	693	196	8.2
195/70R15C	104/102R	BSW	6J	450/65	655	201	9.2
205/70R15C	106/104R	BSW	6J	450/65	669	209	8.5
215/65R15C	104/102R	BSW	6 1/2J	375/55	661	221	8.5
215/70R15C	109/107R	BSW	6 1/2J	450/65	683	221	8.5
225/70R15C	112/110R	BSW	6 1/2J	450/65	697	228	8.7
175/75R16C	101/99R	BSW	5J	475/69	668	177	7.8
185/75R16C	104/102R	BSW	5J	475/69	684	184	8.1
195/65R16C	104/102R	BSW	6J	475/69	660	201	8.4
195/75R16C	107/105R	BSW	5 1/2J	475/69	698	196	8.2
205/65R16C	107/105T	BSW	6J	475/69	672	209	8.7
205/75R16C	110/108R	BSW	5 1/2J	475/69	714	203	8.5
215/65R16C	109/107T	BSW	6 1/2J	475/69	686	221	8.7
215/75R16C	113/111R	BSW	6J	475/69	728	216	8.5
225/65R16C	112/110T	BSW	6 1/2J	475/69	698	228	8.7
235/65R16C	115/113R	BSW	7J	475/69	712	240	10

ENERGYWAY II



- Reinforced structure and special abrasion-resistant tread compound deliver extrapuncture resistance and load bearing capability with more mileage.
- Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.
- Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.
- White sidewall rib shows extraordinary appearance.

SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OA.DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
155R13C	85/83R	RBL	4.50B	350/50	578	157	7.8
185R14C	102/100R	WSW	5 1/2J	450/65	650	188	8.2
195R14C	106/104R	WSW	5 1/2J	450/65	666	198	8.2
205/75R14C	109/107R	WSW	5 1/2J	475/69	664	203	8.7
185R15C	103/102R	WSW	5 1/2J	450/65	674	188	8.2
195R15C	106/104R	WSW	5 1/2J	450/65	693	196	8.2
205/75R15C	109/107R	WSW	5 1/2J	475/69	689	203	8.7

COMFORTWAY



- Four main grooves provide good driving stability and wet performance.
- Reasonable pattern area, perfect collocation of every grooves.
- Special tread compound, ensure tire performance stability in all kinds of weather conditions.
- White sidewall rib shows extraordinary appearance.

SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX.PRESSURE	OA.DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
P195/75R14	92S	WSW	5 1/2J	300/44	648	196	7.8
P205/75R14	95S	WSW	5 1/2J	300/44	664	203	7.8
P205/75R15	97T	WSW	5 1/2J	300/44	689	203	7.9
P205/70R15	95S	WSW	6J	300/44	669	209	7.8
P215/75R15	100T	WSW	6J	300/44	703	216	8.2
P225/70R15	100T	WSW	6 1/2J	300/44	697	228	7.9
P225/75R15	102T	WSW	6J	300/44	719	223	7.9
P235/75R15	105S	WSW	6 1/2J	300/44	733	235	8.2

ECOWAY I



ENERGYWAY III

MILEWAY

SMARTWAY I

SMARTWAY II

TOURWAY

PATTERN NAME	SIZES DESCRIPTION		SIDEWALL DESCRIPTION	STANDARD RIM	MAX. PRESSURE		OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm
					SINGLE	DUAL			
TOURWAY	145R12C	86/84Q	BSW	4.00B	450	450	537	145	8.1
MILEWAY	155R12LT	88/86N	BSW	4.50B	450	450	553	157	8.5
	185R14LT	102/100Q	BSW	51/2J	450	450	652	189	9
ENERGYWAY III	195R14LT	105/103Q	BSW	51/2J	450	450	668	196	9
	195R15LT	106/104Q	BSW	51/2J	450	450	693	196	9
	7.00R16LT	115/110M	BSW	5.50F	670	670	775	200	10
ECOWAY I	7.50R16LT	122/118L	BSW	6.00G	770	770	805	215	12
SMARTWAY I	5.00R12ULT	83/81P	BSW	3.50B	500	500	568	143	10
SMARTWAY II	5.50R13LT	88/84P	BSW	4.00B	420	420	620	160	9.7

RICHWAY

- 3 line smooth rib block design providing superb noise levels and comfort in on-road, light off-road and slight snow condition.
- Sharp-edged non-smooth groove guarantee protection against aquaplaning and also increasing steering performance.
- Multiple 3D non-linear design remove the sympathetic vibration
- Advanced all season compound with silica enhancing greatly for the breaking and traction both on dry and wet road surface, improving the mileage as well.



SIZES DESCRIPTION	SIDEWALL DESCRIPTION	STANDARD RIM	MAX. PRESSURE	OA DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH ±0.3mm	
175/70R12	80T	BSW	5J	300/44	509	177	7.4
165/70R13	79T	BSW	5J	300/44	562	170	7.1
175/70R13	82T	BSW	5J	300/44	576	177	7.3
185/70R13	86T	BSW	5J	300/44	590	189	7.9
185/65R14	86H	BSW	5J	300/44	596	189	7.6
185/70R14	88H	BSW	5J	300/44	616	189	7.6
205/70R14	95H	BSW	5J	300/44	644	209	8.1
195/60R15	88H	BSW	5J	300/44	615	201	7.6
195/65R15	91H	BSW	5J	300/44	635	201	7.6
205/65R15	94H	BSW	5J	300/44	647	209	7.9



SNOW GUARD



- Multi-directional groove distribution design:**
 It is beneficial to improve the stability of driving in the ice and the safety of driving
- Diamond Angle cutting design**
 Can effectively pierce through the water film, stabilize on ice and improve the anti-slip effect
- High-density 3D steel sheet design**
 While ensuring the softness of the grounding surface of the tire, it also increases the strength of the overall pattern block to ensure super grip and reduce the feeling of driving lag
- High-score white carbon black formula design**
 Improve tire grip in cold environments and ensure tire safety performance at low temperatures



SNOW GUARD												
SIZE	INCH	LOADING INDEX	SPEED RATING	TREAD DEPTH (mm)	INFLATABLE SECTION WIDTH (mm)	STANDAR RIM	OVERALL DIAMETER (mm)	MAX LOAD KG	MAX LOAD LBS	MAX PRESSURE KPA	MAX PRESSURE PSI	SIDELABEL DESCRIPTION
175/70R13	13	82	S	8.3	177	5J	576	Kg	1047	300	44	BSW
175/65R14	14	82	S	8.3	177	5J	584	Kg	1047	300	44	BSW
175/70R14	14	84	S	8.5	177	5J	602	Kg	1102	300	44	BSW
185/60R14	14	82	S	8.3	189	5 1/2J	578	Kg	1047	300	44	BSW
185/65R14	14	86	S	8.3	189	5 1/2J	596	Kg	1168	300	44	BSW
185/70R14	14	88	S	8.5	189	5 1/2J	616	Kg	1235	300	44	BSW
185/55R15	15	82	S	8.3	194	6J	585	Kg	1047	300	44	BSW
185/60R15	15	84	S	8.8	189	5 1/2J	603	Kg	1102	300	44	BSW
185/65R15	15	88	S	8.3	189	5 1/2J	621	Kg	1235	300	44	BSW
195/50R15	15	82	S	8.8	201	6J	577	Kg	1047	300	44	BSW
195/55R15	15	85	S	8.8	201	6J	595	Kg	1135	300	44	BSW
195/60R15	15	88	S	8.3	201	6J	615	Kg	1235	300	44	BSW
195/65R15	15	91	S	8.8	201	6J	635	Kg	1356	300	44	BSW
205/65R15	15	94	S	8.5	209	6J	647	Kg	1477	300	44	BSW
205/70R15	15	96	S	8.5	209	6J	669	Kg	1565	300	44	BSW
195/55R16	16	87	S	8.8	201	6J	620	Kg	1201	300	44	BSW
205/55R16	16	91	S	8.3	214	6 1/2J	632	Kg	1356	300	44	BSW
205/60R16	16	92	S	9.1	209	6J	652	Kg	1389	300	44	BSW
215/55R16	16	93	S	8.8	226	7J	642	Kg	1433	300	44	BSW
215/60R16	16	95	S	9.1	221	6 1/2J	664	Kg	1521	300	44	BSW
215/65R16	16	98	S	8.5	221	6 1/2J	686	Kg	1653	300	44	BSW
215/45R17	17	87	S	8.8	213	7J	626	Kg	1201	300	44	BSW
215/50R17	17	91	S	8.8	226	7J	648	Kg	1356	300	44	BSW
215/55R17	17	94	S	8.8	226	7J	668	Kg	1477	300	44	BSW
215/60R17	17	96	S	8.5	221	6 1/2J	690	Kg	1565	300	44	BSW
225/45R17	17	91	S	8.8	225	7 1/2J	634	Kg	1356	300	44	BSW
225/60R17	17	99	S	8.5	228	6 1/2J	702	Kg	1709	300	44	BSW
225/65R17	17	102	S	8.5	228	6 1/2J	724	Kg	1874	300	44	BSW
265/65R17	17	112	S	9.5	272	8J	776	Kg	2469	300	44	BSW
185/75R16C	C	104/102	R	10	184	5J	684	Kg	3968	475	70	BSW
195/75R16C	C	107/105	Q	10	196	5 1/2J	698	Kg	4299	475	70	BSW



- Ideal for conditions in the region which does not require extreme snow tyres and more performance is required.
- This unique tread design also features a proven modular tread block geometry which offer a level of grip and performance which is unique in its class.
- A Directional tyre that offers fantastic water dispersion and exceptional grip thanks to its unique features which includes an excessive number of sips allowing the tread to conform to the road surface, and its extra wide channels that excavates fluids in preposition to the pressure and weight of the vehicle and road requirements.



SNOWAY STUD



SIZES DESCRIPTION	PR	LOADING INDEX	SPEED RATING	TREAD DEPTH	INFLATABLE SECTION WIDTH	STANDARD RIM	OVERALL DIAMETER	MAX LOAD KG	MAX LOAD LBS	MAX PRESSURE KPA	MAX PRESSURE PSI	SEWALL DESCRIPTION
175/65R14	-	82	S	8.8	177	5	600	530	1,177	340	50	BSW
175/70R13	-	82	S	8.8	189	5	560	584	1,296	340	50	BSW
185/60R15	-	84S	S	8.7	214	6	630	635	1,410	340	50	BSW
185/65R14	-	86S	S	8.7	201	6	700	708	1,572	340	50	BSW
185/65R15	-	88S	S	8.8	214	7	710	676	1,501	340	50	BSW
195/60R15	-	88S	S	8.8	201	5	690	950	2,109	340	50	BSW
195/65R15	-	91S	S	8.8	201	6	630	750	1,665	340	50	BSW
205/55R16	-	91	S	8.8	214	6	710	584	1,296	340	50	BSW
205/60R16	-	92	S	8.7	209	7	775	603	1,339	340	50	BSW
215/60R16	-	95	S	8.8	225	5	800	850	1,887	340	50	BSW
215/65R16	-	98	S	8.8	248	7	775	850	1,887	340	50	BSW
215/70R16	-	100	T	8.8	209	7	850	900	1,998	340	50	BSW
235/70R16	-	106	T	8.8	221	5	775	950	2,109	340	50	BSW
185/75R16C	8PR	104/102	R	8.8	223	5	800	750	1,665	340	50	BSW
195/75R16C	8PR	107/105	R	8.8	214	5	900	530	1,177	340	50	BSW
235/65R16C	8PR	121/119	R	8.8	209	6	950	584	1,296	340	50	BSW
225/45R17	-	94	H	8.8	221	6	900	603	1,339	340	50	BSW
205/50R17	-	93	T	8.8	223	6	710	621	1,379	340	50	BSW
225/50R17	-	98	H	8.8	214	5	775	615	1,365	340	50	BSW
215/55R17	-	98	T	8.8	201	5	850	635	1,410	340	50	BSW
225/55R17	-	101	H	8.8	189	6	775	708	1,572	340	50	BSW
215/60R17	-	100	H	8.8	201	6	800	676	1,501	340	50	BSW
225/60R17	-	103	H	8.8	201	5	900	686	1,523	340	50	BSW
225/65R17	-	106	T	8.8	214	6	950	850	1,887	340	50	BSW
235/65R17	-	108	T	8.8	201	5	875	800	1,776	340	50	BSW
235/45R18	-	98	T	8.8	214	6	800	850	1,887	340	50	BSW

SNOWAY STUD



TYRE LIFE GUARANTEE

MAKING A CLAIM

We'll replace any Wideday tyre that is found to be defective due to the manufacturing process or materials used. Any tyre with unreparable damage that results from normal road use will be replaced.

To make a claim against your Wideday guarantee you need to return the tyre to the Wideday dealer you bought it from. The dealer will replace the tyre at a discounted price based on the amount of tyre tread remaining according to this scale:

TYRE LIFE GUARANTEE DISCOUNT SCALE

Remaining tread depth	Discount offered
More than 75%	Free replacement tyre
60 - 75%	80%
40-60%	60%
20-40%	40%
Less than 20%	No discount

GUARANTEE EXCLUSIONS

The Wideday guarantee covers material or manufacturing defects and irreparable damage caused by normal road use. It excludes damage caused by:

- Mechanical default in the vehicle
- Use of unsuitable wheels
- Not maintaining correct tyre pressures
- Carrying or towing loads in excess of vehicle specifications
- Improper or prolonged use of snow chains
- Competition use
- Removal of wheel or poor fitting of the tyre
- Acts of God, fire, vandalism or theft
- Road traffic accident damage or ensuing problems
- Use of tyre that doesn't match vehicle specification
- Prolonged contact with acids, solvents or oils.

TAKE CARE OF YOUR TYRES AND THEY'LL TAKE CARE OF YOU

Wear and depth

Tyre wear affects vehicle performance and safety. The deeper the groove, the more grip and traction your tyre will have. Make sure you regularly check the tread depth of your tyres and replace them when they are worn.

You can check the tread depth by using a depth gauge - tyres should be changed when groove depth is less than 2mm.

Tyre pressure

Keeping your tyres at optimum pressure reduces the risk of loss of control and protects from premature wear and damage. Tyre pressure can drop due to small perforations, the natural escape of air or a decrease in ambient temperatures.

You'll find the recommended tyre pressure for your vehicle in the user manual, on a door/doorframe label or on the inside of your fuel flap.

M+S 

SNOWWAY VAN

- **Optimized groove**
It is beneficial to improve the stability of driving on ice and improve driving safety
- **Shoulder support**
The Shoulder continuity pattern block can improve the strength of the tyre shoulder improve the support effect with the ground, and ensure driving safety.
- **Optimized structure profile**
The optimized structure profile is matched with dense and robust pattern blocks to meet the better carrying capacity of the vehicle
- **New steel sheet design**
The optimized steel sheet structure can meet the requirement of anti-skid performance and evenly disperse various stresses, so that the tread wear is more uniform and the wear resistance is improved.



SNOWWAY VAN



SIZES DESCRIPTION	PR	LOADING INDEX	SPEED RATING	TREAD DEPTH (mm)	INFLATABLE SECTION WIDTH	STANDARD RIM	OVERALL DIAMETER	MAX LOAD		MAX PRESSURE		SIDEWALL DESCRIPTION
								KG	LBS	KPA	PSI	
195/70R15C	8PR	104/102	R	9.6	228	7	98	900	1,998	475	55	BSW
215/65R16C	8PR	109/107	R	9.6	223	7	744	950	2,109	475	55	BSW
225/70R15C	8PR	112/110	R	9.6	240	8	712	750	1,665	475	55	BSW